

MODIS Level 1B Algorithm Theoretical Basis Document

MODIS Characterization Support Team

Jack Xiong, Gary Toller, Vincent Chiang, Junqiang Sun, Joe Esposito, and William Barnes



Version 3

December 14, 2005

Prepared For:
National Aeronautics and Space Administration

Table of Contents

1.	INTRODUCTION	1
	1.1 OVERVIEW	1
	1.2 HISTORICAL PERSPECTIVE	1
	1.3 DOCUMENT CONTEXT AND SCOPE	2
	1.4 RELEVANT DOCUMENTS	2
2.	INSTRUMENT DESCRIPTION	3
	2.1 OVERVIEW	3
	2.2 SOLAR DIFFUSER (SD) AND SOLAR DIFFUSER STABILITY MONITOR (SDSM)	8
	2.3 ON-BOARD BLACKBODY (BB)	8
	2.4 SPECTRO-RADIOMETRIC CALIBRATION ASSEMBLY (SRCA)	9
3.	CALIBRATION ALGORITHM FOR THE THERMAL EMISSIVE BANDS (TEB)	10
	3.1 PRE-LAUNCH CHARACTERIZATION AND CALIBRATION	10
	3.2 ON-ORBIT CALIBRATION ALGORITHM	11
	3.3 SPECIAL CONSIDERATIONS IN THE TEB CALIBRATION ALGORITHM	13
	3.3.1 Band 21 Calibration	14
	3.3.2 Terra MODIS PC Bands Optical Leak	14
	3.3.3 Aqua MODIS Bands 33, 35, and 36 On-Orbit Calibration	16
	3.3.4 Moon in the SV Port	16
	3.4 UNCERTAINTY	16
4.	CALIBRATION ALGORITHM FOR THE REFLECTIVE SOLAR BANDS (RSB)	20
	4.1 PRE-LAUNCH CHARACTERIZATION and CALIBRATION	20
	4.2 ON-ORBIT CALIBRATION ALGORITHM	21
	4.3 SPECIAL CONSIDERATIONS IN THE RSB CALIBRATION ALGORITHM	23
	4.3.1 SWIR Crosstalk Correction	23
	4.3.2 B26 De-Striping Algorithm	24
	4.3.3 Aqua Band 6 Consideration	24
	4.3.4 Moon in the SV Port	24
	4.4 UNCERTAINTY	25
5.	LEVEL 1B DATA PRODUCTS AND CALIBRATION ALGORITHM IMPLEMENTATION	29
	5.1 L1B DATA PRODUCTS	29
	5.2 L1B ALGORITHM IMPLEMENTATION	30
	5.3 L1B DATA PRODUCT RETRIEVAL	32
6.	SUMMARY	33
7.	REFERENCES	34

8.	APPENDIX A: MODIS SPECIFICATIONS AND DESIGN PARAMETERS	37
9.	APPENDIX B: L1B TEB SCALED INTEGERS	38
10	APPENDIX C: L1B RSB SCALED INTEGERS	38
11.	APPENDIX D: UNCERTAINTY INDEX IN THE L1B PRODUCTS	38
12.	APPENDIX E: ACRONYMS AND ABBREVIATIONS	40

Figures

Figure 1	MODIS Scan Cavity and On-Board Calibrators	5
Figure 2	Schematic of the Optical System	5
Figure 3	MODIS' Focal Plane Assemblies:	6
Figure 4a	The Primary Mirror Scan Angles of the Ground Calibration Sources, Space, and Earth.	7
Figure 4b	AOIs Corresponding to Primary Mirror Scan Angles	7
Figure 5	MODIS RSB Calibrator: Solar Diffuser	8
Figure 6	Solar Diffuser Stability Monitor	8
Figure 7	On-Board Blackbody Calibration Source	9
Figure 8	Specto-Radiometric Calibration Assembly	9
Figure 9	Blackbody Calibration Source (BCS)	10
Figure 10	Lunar Responses for Band 31 and 33	15
Figure 11	Band 35 Images Before and After PC Crosstalk Correction	16
Figure 12	Earth View Radiance Uncertainties at a Typical EV Radiance	19
Figure 13	MODIS Reflective Solar Bands Pre-launch Calibration Source: SIS-100	21
Figure 14	TEB L1B Flow Diagram	30
Figure 15	RSB L1B Flow Diagram	31

Tables

Table 1	MODIS Measured Characteristics	4
Table 2	L1B Uncertainty Index (UI) Mapped to TEB Uncertainty in Percent	20
Table 3	Uncertainties of the Solar Diffuser BRF	26
Table 4	Summary of the Terra MODIS RSB Calibration Uncertainty at typical radiance level for calibration before July 2, 2003 (extra 1% uncertainty applied to SWIR bands 5-7 and 26)	27
Table 5	Summary of Terra MODIS RSB Calibration Uncertainty at typical radiance level for calibration after July 2, 2003 (extra 1% uncertainty applied to SWIR bands 5-7 and 26)	28
Table 6	Summary of Aqua MODIS RSB Calibration Uncertainty at typical radiance level (extra 0.5% uncertainty applied to SWIR bands 5-7 and 26)	28

1. INTRODUCTION

1.1. Overview

The MODerate-resolution Imaging Spectroradiometer (MODIS) is a key instrument for the NASA's Earth Observing System (EOS). The EOS was designed to provide global observations and scientific understanding of land cover changes and global productivity, sea surface temperature, atmospheric and climate changes, and natural hazards [Salomonson et al., 2005].

MODIS [Xiong et al., 2005a] is a passive imaging spectroradiometer with 490 detectors, arranged in 36 spectral bands that are sampled across the visible and infrared spectrum. It is a high signal-to-noise instrument designed to satisfy a diverse set of oceanographic, terrestrial, and atmospheric science observational needs. The near-daily global coverage of MODIS, combined with its continuous operation, broad spectral coverage, and relatively high spatial resolution, makes the MODIS instruments central to the objectives of NASA's EOS program. MODIS observations and science data products are applied to many of the areas identified as EOS science topics, such as land surface composition, land surface biological activity, surface temperature, snow and sea-ice extent and character, ocean and lake physics and biogeochemical activity, aerosol properties, and cloud properties. The MODIS Proto-Flight Model (PFM) was launched December 18, 1999 on-board the Terra spacecraft in a 10:30 AM (local time, descending node) orbit. The Aqua Flight Model (FM-1) was launched onboard the Aqua spacecraft into a 1:30 PM (local time, ascending node) orbit on May 4, 2002.

The MODIS development was managed by NASA's Goddard Space Flight Center (GSFC) in Greenbelt, Maryland. The MODIS instruments were designed, built, and tested by Raytheon / Santa Barbara Remote Sensing (SBRS) in Goleta, California. The MODIS Characterization Support Team (MCST), working under the direction of the MODIS Team Leader, is responsible for the characterization and radiometric calibration of the MODIS instruments [Xiong et al., 2005a]. MCST developed the Level 1B (L1B) software that converts instrument response in digital numbers (DN) to calibrated, geo-located top of the atmosphere (TOA) radiances for all bands and to the reflectance factors for the 20 reflective solar bands (RSB). The MODIS data products provided by the MODIS Science Team support the Earth science community at large, interdisciplinary investigators, and the MODIS Science Team members' own investigations.

1.2. Historical Perspective

The MODIS was designed to continue global monitoring similar to the observations initiated with the Nimbus 7 Coastal Zone Color Scanner (CZCS), the Advance Very High Resolution Radiometer (AVHRR), the High Resolution Infrared Spectrometer (HIRS), the Landsat Thematic Mapper (TM), and the Orbview-2 Sea-viewing Wide Field of View Sensor (SeaWiFS). The selection of MODIS spectral bands and the development of many of the MODIS science data products rely on the experiences and lessons learned from predecessor missions. This continuity allows many previously existing data records to be extended with improved coverage and quality.

New features incorporated into MODIS include a thin-cirrus cloud detection channel, low gain bands to detect surface fires, and high gain bands for ocean chlorophyll fluorescence-line height

discrimination. Additional information about the MODIS instrument development team, MODIS requirements, and program development is presented by Barnes et al [2003]. Key MODIS specifications and design parameters are listed in Appendix A.

1.3. Document Context and Scope

This ATBD describes how MODIS operates in space and provides the equations implemented by the L1B software to generate the MODIS MOD02 (Terra) and MYD02 (Aqua) data products. It is a summary document that presents the formulae and error budgets used to transform MODIS digital counts to radiance and reflectance. It describes the current, post-launch MODIS calibration process and supersedes previous ATBDs [Barker et al. (Version1), 1994] [MCST (Version 2), May 1997]. Analysis of instrumental on-orbit performance by MCST and investigation of L1B products by the Science Team have resulted in several L1B software updates and improvements. This ATBD corresponds to the Version 5.0 Terra and Aqua software releases. The MCST and the Science Data Support Team (SDST) will provide future software deliveries to the Goddard Distributed Archive and Analysis Center (GDAAC).

The MODIS calibrated data product results from the application of the formulae and the determination of corresponding uncertainties described in this document and the referenced support documents. The support documents present details of how the instrument data are transformed from counts to (1) reflectance factors and radiances for the reflective solar bands, (2) radiances for the thermal emissive bands, (3) changes in the center wavelengths for the solar reflecting bands, and (4) relative spatial shifts for the pixels along scan and the bands along track. Items (1) and (2) are the focus of this document and of the on-line production processing efforts. They are produced at the GDAAC. Items (3) and (4) are evaluated off-line by the MCST.

The instrument is described in section 2 of this document. The key calibration equations applied by the L1B algorithms to the thermal emissive band (TEB) and the reflective solar band (RSB) data are presented in sections 3 and 4, respectively. These sections also describe MODIS instrumental effects handled within L1B and tabulate the associated uncertainties in Terra/MODIS and Aqua/MODIS processing. An overview of the L1B calibration algorithm is given in section 5 and a summary follows in section 6.

1.4. Relevant Documents

Documents containing more complete derivations and explanations of the implementation of these algorithms include [EOS, 1994], [MODIS Characterization Support Team (1997)], [Guenther et al., 1996] and [Isaacman et al., 2003]. Pre-launch sensor characterization publications include [GSFC, 1993], [SBRS, 1993], [SBRS, 1994], [Guenther et al., 1995], and [Barnes et al., 1998].

The L1B approach to calibration is described in the MODIS Level 1B In-Granule Calibration Code (MOD_PR02) High-Level Design [MCST, 2003a]. Program file specifications and metadata are described in the MODIS Level 1B Product Data Dictionary [MCST, 2003b]. The product format and the scaling algorithms used to generate the calibrated products are presented

in the MODIS Level 1B Product User's Guide [MCST, 2003c]. Each of these documents is available from the MCST web site: <http://www.mcst.ssai.biz/mcstweb/L1B/product.html>.

Data flow diagrams for the reflective solar and thermal emissive band algorithms, L1B input files, data products, and a discussion of the look-up tables (LUTs) that provide the parameters needed to generate L1B are summarized in “MODIS Level 1B Calibration and Data Products” [MCST, 2003d]. The LUT documentation is also available from the above MCST web site. Solar and lunar position vectors together with the MODIS geolocation product are used within the L1B algorithm. A separate ATBD exists for the MODIS geolocation algorithms [Nishihama et al., 1997].

2. INSTRUMENT DESCRIPTION

2.1. Overview

MODIS is a passive cross-track-scanning imaging radiometer designed to take measurements in spectral regions that have been included in a number of heritage sensors. MODIS uses a two-sided beryllium paddle-wheel scan mirror that continuously rotates at 20.3 rpm (a scan period of 1.478s per mirror side). The instrument field of view (FOV) is $\pm 55^\circ$ from the nadir. Viewing the Earth from a sun-synchronous near polar orbit at an altitude of 705km, the two sides of the scan mirror alternately produce a swath of 2330km along scan by 10km (at nadir) along track. Both Terra and Aqua MODIS are able to provide near-global coverage in 2 days, enabling comprehensive short- and long-term studies of the Earth's land, oceans, and atmosphere.

MODIS [Xiong et al., 2005a] has 36 spectral bands with wavelengths from 0.41 to 14.5 μ m. The center wavelength and band-pass of each band were carefully selected to optimize measurements of key features of the Earth's land, ocean, and atmosphere. MODIS bands 1-19 and 26 are the reflective solar bands (RSB) that provide images from daylight reflected solar radiation and bands 20-25, and 27-36 are the thermal emissive bands (TEB) that provide day and night images of thermal emissions. The measured characteristics in Table 1 can be compared to the MODIS design specifications provided in Appendix A.

MODIS bands 1-2 have a nominal nadir resolution of 250m with 40 detectors per band along-track, bands 3-7 have a nadir resolution of 500m with 20 detectors per band along-track, and bands 8-36 have a nadir resolution of 1km with 10 detectors per band along-track. Bands 13 and 14 have 2 arrays of 10 along-track detectors each, providing observations with high gain and low gain through time delay and integration (TDI). Each sample for bands 13 and 14 combines the responses from a pair of TDI detectors with their signals amplified through both high and low gain amplifiers. Therefore, MODIS has a total of 490 detectors. For a 1km (along scan) by 10km (along track) frame of data, each detector of the 250m resolution bands (1-2) takes 4 samples and each detector of the 500m resolution bands (3-7) takes 2 samples. Thus there are a total of 830 samples for each frame. MODIS digitizes each sample to 12-bit resolution. The average data rate over an orbit is 6.1 megabits per second.

BAND	Central λ Terra, Aqua nm	Bandwidth Terra, Aqua nm	Terra SNR At Ltyp	Aqua SNR At Ltyp
1	646.3, 645.8	47.8, 47.2	186	193
2	856.5, 856.9	37.7, 37.8	517	508
3	465.7, 466.1	18.6, 18.8	328	317
4	553.7, 553.9	19.7, 19.6	330	319
5	1242.3, 1241.5	23.5, 22.8	161	149
6	1629.4, 1628.1	28.4, 26.9	472	424
7	2114.2, 2113.9	52.4, 52.3	147	152
8	411.8, 412.4	14.7, 14.3	1097	1071
9	442.1, 442.2	9.6, 9.6	1495	1400
10	487.0, 487.4	10.5, 10.6	1521	1311
11	529.7, 530.1	11.9, 11.9	1604	1341
12	546.9, 547.2	10.2, 10.3	1452	1172
13	665.6, 666.0	10.0, 10.0	1413	1165
14	677.0, 677.6	11.3, 11.2	1518	1271
15	746.6, 746.8	9.9, 9.8	1519	1138
16	866.3, 866.9	15.5, 15.5	1400	1062
17	904.2, 904.4	34.7, 34.6	379	373
18	935.7, 936.4	13.5, 13.5	76	91
19	936.2, 936.3	45.7, 46.1	509	503
26	1382.3, 1382.3	34.6, 36.4	230	282
BAND	Central λ Terra, Aqua nm	Bandwidth Terra, Aqua nm	Terra NEdT (K) (Terra A1)	Aqua NEdT (K) (Aqua B)
20	3788.3, 3780.2	187.5, 186.9	0.03	0.02
21	3992.2, 3981.8	82.8, 83.3	0.15	0.21
22	3972.0, 3972.0	86.1, 85.4	0.02	0.02
23	4056.7, 4061.6	85.6, 85.3	0.02	0.02
24	4473.2, 4448.3	90.2, 92.2	0.13	0.11
25	4545.4, 4526.3	91.1, 90.4	0.05	0.04
27	6770.5, 6786.8	239.1, 187.9	0.10	0.10
28	7342.9, 7349.3	320.6, 314.9	0.05	0.05
29	8528.7, 8555.3	344.1, 359.2	0.02	0.02
30	9734.1, 9723.7	297.2, 301.1	0.11	0.07
31	11018.9, 11026.2	516.3, 531.1	0.03	0.02
32	12032.1, 12042.3	520.7, 521.5	0.04	0.03
33	13365.0, 13364.7	307.6, 310.9	0.13	0.08
34	13683.3, 13685.9	324.1, 341.7	0.23	0.12
35	13913.2, 13925.2	327.7, 332.7	0.23	0.15
36	14195.6, 14215.2	284.9, 327.9	0.43	0.23

Table 1: MODIS Measured Characteristics. Note: The Terra SNR and NEdT are for the initial on-orbit operational configuration.

Figure 1 shows the MODIS scan cavity and the on-board calibrators. The on-board calibrators (OBCs) include a solar diffuser (SD) and solar diffuser stability monitor (SDSM), a blackbody (BB) and a space view (SV) port, and a spectro-radiometric calibration assembly (SRCA). The optical system schematic is shown in Figure 2. The scan mirror reflects energy to the fold mirror. The aft optics consist of a two mirror off-axis telescope, and a series of dichroic beam splitters and band pass filters that separate the radiation onto four focal plane assemblies (FPAs). These are designated, according to their spectral regions, as: visible (VIS), near infrared (NIR), short and middle wave infrared (SMIR), and long wave infrared (LWIR).

On-Board Calibrators in MODIS Scan Cavity

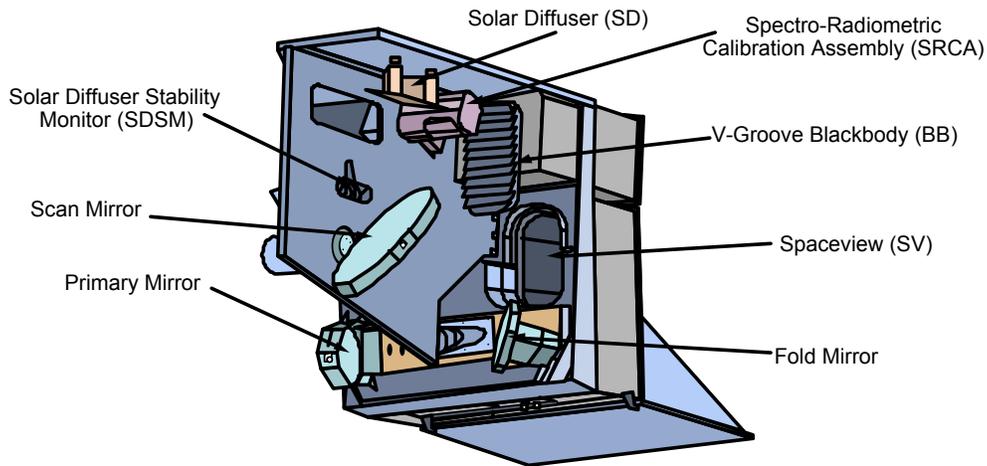


Figure 1: MODIS scan cavity and on-board calibrators

MODIS Optics System

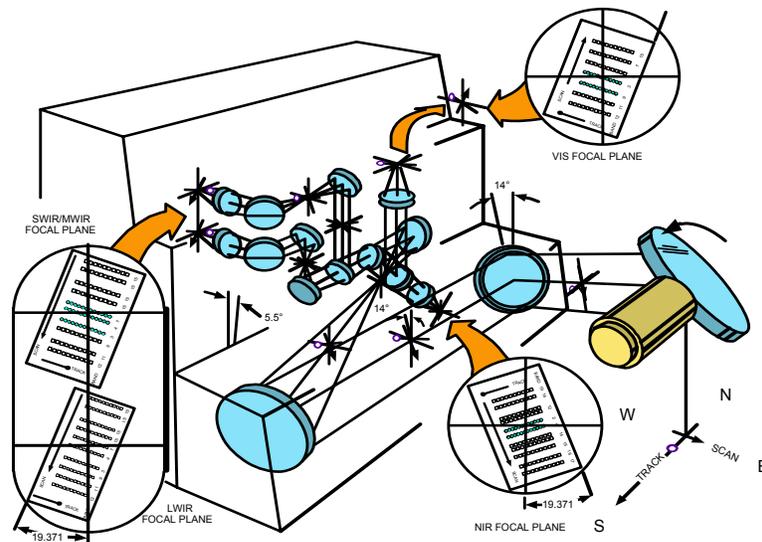


Figure 2: Schematic of the optical system

The locations of the MODIS' 36 spectral bands (490 detectors) on the four FPAs are shown in Figure 3. The detector numbering convention in Figure 3 corresponds to that of the MCST Level 1B processing and is called "product order". Product order is the inverse of the instrument builder's "SBRs order" detector numbering convention. The SMIR and LWIR FPA are controlled by a radiative cooler to 83K during on-orbit operation.

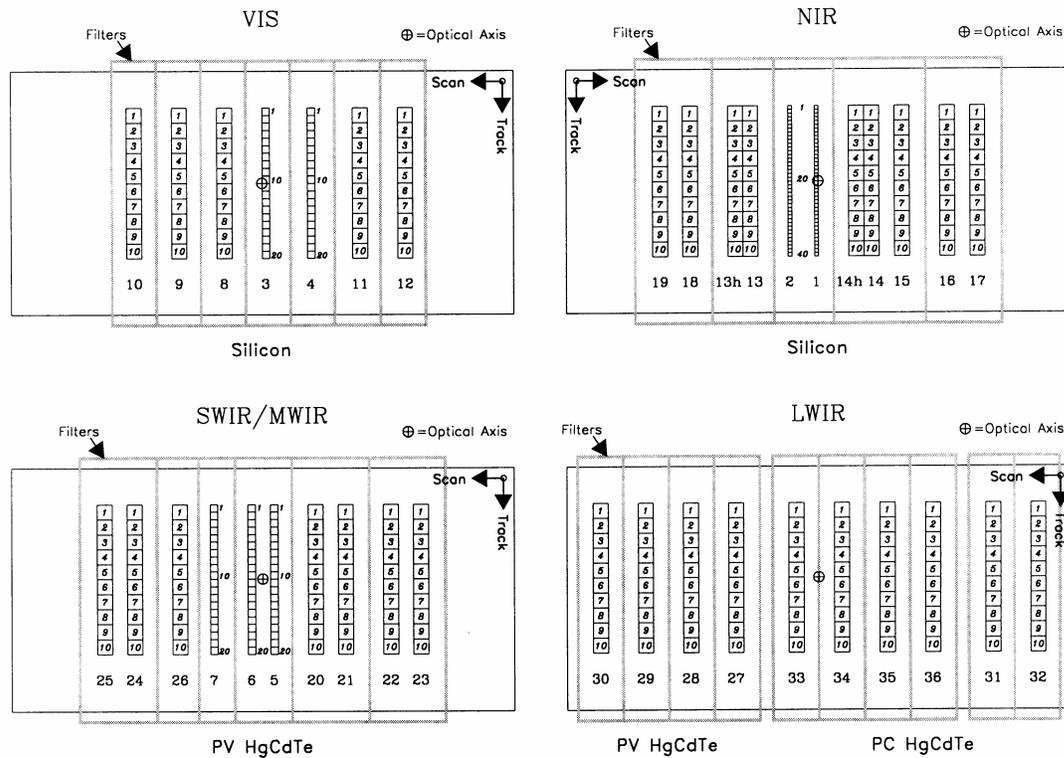


Figure 3: MODIS' focal plane assemblies

The MODIS detectors view the on-board calibrators through the same optical path as the Earth observations, but at different viewing angles or at different angles of incidence (AOIs) to the scan mirror. As the MODIS scan mirror rotates, each side scans the Solar Diffuser (SD), the Spectro-Radiometric Calibration Assembly (SRCA), the Blackbody (BB), the space view (SV), and the Earth (EV). Figures 4a and 4b illustrate the scan angles and their corresponding AOIs. MODIS calibration corrects for a response versus scan angle (RVS) effect.

The VIS and NIR detector arrays are photovoltaic (PV) silicon hybrids that are operated at instrument ambient temperature. The SMIR FPA uses PV HgCdTe hybrid arrays. The LWIR FPA consists of PV HgCdTe detector arrays for bands with wavelengths less than 10 μ m and photoconductive (PC) HgCdTe detectors for bands beyond 10 μ m.

The analog output signals produced by the PV FPAs are buffered and digitized in the space view analog module (SAM). The signals produced by the PC detectors on the LWIR FPA are pre-amplified by the cooler located amplifier module (CLAM) and then post-amplified and digitized by the forward viewing analog module (FAM). The digital outputs from the SAM and FAM are formatted into science data packets by a formatter/processor in the main electronics module (MEM). They are then buffered and sent to the spacecraft through a first-in first-out (FIFO) buffer and fiber distributed data interface (FDDI) circuits.

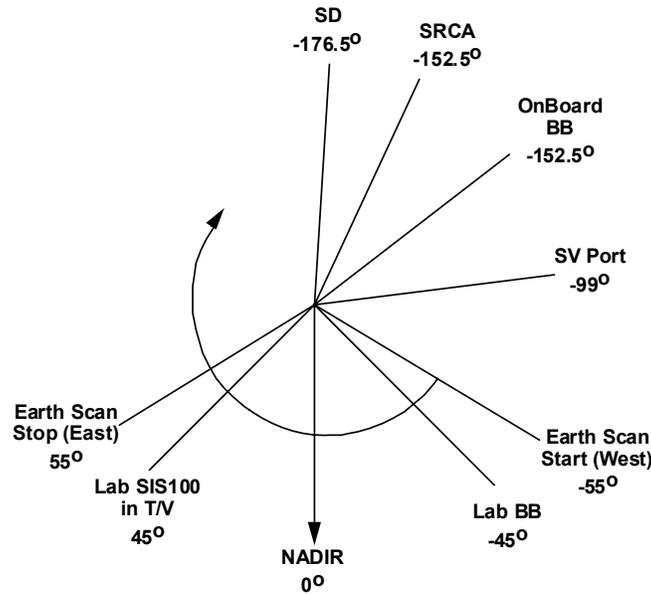


Figure 4a: The primary mirror scan angles of the ground calibration sources, space, and Earth.

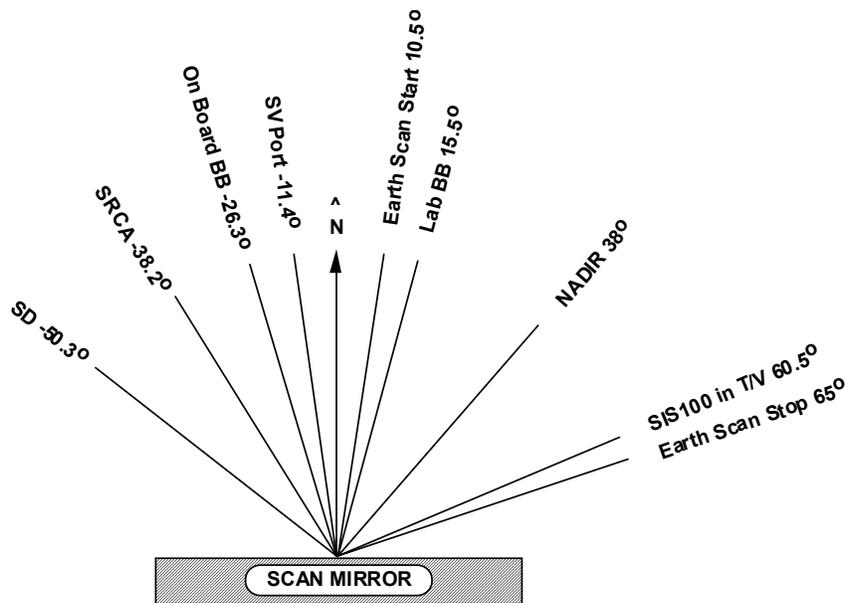


Figure 4b: The angles of incidence (AOIs) corresponding to primary mirror scan angles for the observed elements.

2.2. Solar Diffuser (SD) and Solar Diffuser Stability Monitor (SDSM)

The SD and SDSM shown in Figures 5 and 6 operate together as a system for calibrating the reflective solar bands (RSB) with wavelengths from 0.41 to 2.2 μm . The diffuser is made of space-grade Spectralon™, a proprietary thermoplastic formulation of polytetrafluoroethylene (PTFE). The SD bi-directional reflectance factor (BRF) was characterized pre-launch with National Institute of Standards and Technology (NIST) traceable reflectance standards. The SD on-orbit degradation is tracked by the SDSM during each weekly calibration sequence. The SDSM itself is a ratioing radiometer which monitors on-orbit SD BRF variation (degradation) by alternatively viewing diffusely reflected Sun light from the SD panel and direct Sun light through an attenuation screen with a nominal 1.44% transmission. The screen is used to keep the signals from the SD and sun view at nearly the same level. The SDSM has nine filtered detectors embedded in a small solar integrating sphere (SIS) that monitors the SD degradation in the wavelength range from 0.41 to 0.94 μm . The specified MODIS RSB uncertainties are $\pm 2\%$ reflectance and $\pm 5\%$ absolute radiance. The reflectance calibration of the RSB from the SD measurements can be converted to a radiance calibration based on published values for the solar spectral irradiance. Two illumination levels of SD calibration are provided via a deployable 8.5% transmission screen. The screen must be in place for calibrating the high gain bands (B8-16 for ocean color observations) since they saturate when viewing direct sun exposure of the SD.



Figure 5: MODIS Solar Diffuser



Figure 6: Solar Diffuser Stability Monitor

2.3. On-board Blackbody (BB)

The thermal emissive bands (TEB) are calibrated by viewing the on-board blackbody (BB) which provides a known radiance source, and, subsequently, cold space through the Space View (SV) port providing measures of the instrument thermal background and electronic offset. This calibration is performed on a scan by scan basis. The on-board blackbody, shown in Figure 7, is a “V-groove” device with known emissivity (approximately 0.992) determined from pre-launch radiometric calibration and characterization. Twelve thermistors embedded beneath the BB front surface, measure the temperature of the BB each scan. The thermistors were calibrated pre-launch using NIST temperature standards. The BB temperature can be varied from the MODIS scan cavity ambient of about 270K up to 315 K by means of electrical heating elements attached to the back of the BB. This allows on-orbit checks of the TEB detectors’ non-linearity. The readings from the BB at any temperature in its operating range are also used by the instrument to

adjust the detectors' DC restore (DCR) in each scan so that an appropriate dynamic range for the electronic readout can be maintained.



Figure 7: On-Board Blackbody Calibration Source

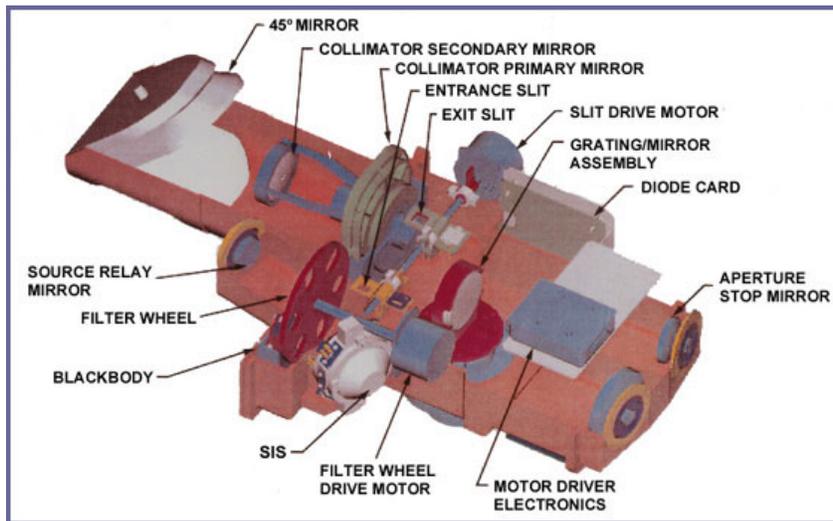


Figure 8: Spectro-Radiometric Calibration Assembly

2.4. Spectro-radiometric Calibration Assembly (SRCA)

The Spectro-radiometric Calibration Assembly (SRCA) is depicted in Figure 8. It is primarily used for spatial (all 36 bands) and spectral (RSB only) characterization. It also monitors radiometric response changes (RSB only) on-orbit. This device consists of a modified Czerny-Turner monochromator that includes a motor-driven grating/mirror assembly, a filter wheel assembly, incandescent sources, including a SIS with four 10W and two 1W lamps and a separate IR source, and collimating optics located at the exit slit of the monochromator. In spectral mode the SRCA is a monochromator while in spatial modes it becomes a transfer optic by replacing the grating with a plain mirror [Young, 1995b]. The SRCA spectral radiance is self-calibrated on-orbit using known and pre-launch calibrated spectral peaks in a didymium glass

filter located at the exit slit of the monochromator. In the spatial registration mode, the entrance port of the monochromator is open and the exit slit of the monochromator is replaced with specially designed spatial reticles, one for along scan and another for along track [Young, 1995a]. The images of the reticles are projected onto the MODIS FPAs to provide instrument spatial registration information.

3. CALIBRATION ALGORITHM FOR THE THERMAL EMISSIVE BANDS (TEB)

3.1 Pre-launch Characterization and Calibration (TEB)

Pre-launch, each of the MODIS instruments went through a series of comprehensive, system-level, spatial, spectral, and radiometric calibrations and characterizations. The TEB radiometric calibration was performed in a thermal vacuum (TV) environment. To simulate the anticipated range of on-orbit operational conditions, three different temperature plateaus (nominal, cold, and hot) were used during instrument characterization and performance evaluation. Both primary and redundant electronics configurations were tested during radiometric calibration. In addition, different cold focal plane assembly (CFPA) temperature set points were used to characterize the TEB detectors' response changes and sensitivity. The key pre-launch equipment used for the TEB calibration is a large-aperture variable-temperature blackbody calibration source (BCS) with an emissivity better than 0.9995 over the TEB spectral range. A photograph of the BCS is shown in Figure 9. A space view source (SVS), similar to the BCS, operated at an extremely low fixed temperature was used to simulate the deep space view. MODIS TEB pre-launch calibration and characterization included deriving and evaluating each detector's gain (or linear response), non-linearity, noise characteristics, and short-term stability. Some of the parameters obtained pre-launch are also used for the instrument's on-orbit calibration and radiometric uncertainty assessment.

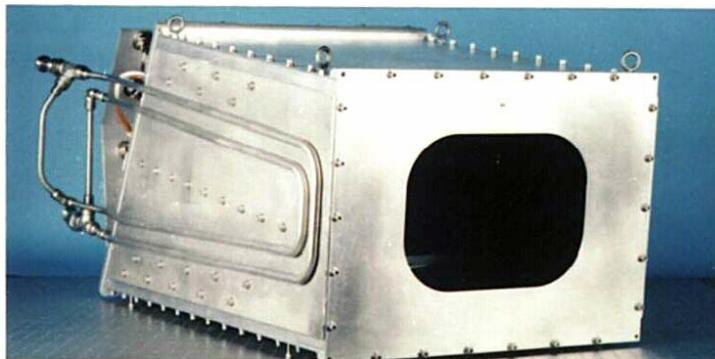


Figure 9: Blackbody Calibration Source (BCS)

The temperature of the on-board BB, shown in Figure 6, was set at 290K (Terra) and 285K (Aqua) during most of the calibration tests while the BCS temperature was varied from 170K to 340K. These tests were performed under a number of different operational conditions including different instrument temperatures and different CFPA temperatures. Determination of the on-board BB emissivity is one of the most important tasks to be completed in order to assure a high-

quality pre-launch to on-orbit radiometric calibration transfer. The BB emissivity for each thermal emissive band is determined from the detectors' responses to the BCS and the BB at the same time.

The MODIS TEB calibration algorithm is based on a quadratic relationship between the detector's response and the input radiance [Goldberg, 1995]. The offset and nonlinear terms derived from the pre-launch radiometric calibration are also used for the initial on-orbit calibration. They are updated on-orbit as needed. There are a number of improvements in the MODIS FM1 design and its pre-launch TV radiometric calibration test procedure based on lessons learned from the PFM TV tests. Both instruments were modified after TV system level tests. The changes were made prior to launch, either to correct identified problems or to improve the sensors' performance using the pre-launch calibration and characterization data. Because of these changes, additional post launch efforts were required to assure on-orbit calibration and characterization quality.

MODIS uses a double-sided scan mirror to make observations of the Earth scenes in a $\pm 55^\circ$ scan angle range about the nadir. For each mirror side, this (scan angle) range corresponds to 1354 EV frames of data with angles of incidence (AOI) on the scan mirror ranging from 10.5° to 65.5° (see Figure 4b). Since the sensor response changes with scan mirror AOI whereas the calibration is performed at a single AOI, it is essential to accurately characterize the sensor's response versus scan-angle (RVS). For the Terra MODIS (PFM), there are no valid pre-launch RVS measurements for the TEB. Initially, the Terra MODIS TEB RVS values were derived using scan mirror witness-sample reflectance measurements (by the National Physical Lab, Great Britain) and the coupling parameters derived from the Aqua MODIS (FM1) TEB RVS measurements. Currently, the Terra MODIS thermal emissive bands use the RVS values derived from on-orbit deep space maneuvers [Xiong et al 2005a].

3.2 On-orbit Calibration Algorithm (TEB)

The MODIS TEB on-orbit calibration is performed for each band, detector, and mirror side [Xiong, et al., 2002a]. It is scan angle dependent and is on a scan-by-scan basis. During each scan, the sensor views the on-board calibrator (OBC) blackbody (BB) at a known temperature (or radiance) and deep space through the instrument space view (SV) port to measure the instrument's thermal background and electronic offset. The calibration coefficients determined are then used for the Earth view (EV) scene radiance retrieval. There are 50 frames (samples) of data collected in each scan when viewing both the BB and SV sectors. The instrument response is provided in 12-bit digital numbers (DN). When the sensor views the BB via its scan mirror, the total path radiance includes the radiance from the BB emission (L_{BB}), the radiance due to the scan mirror emission (L_{SM}), the scan cavity emission (L_{CAV}) reflected from the BB, and the thermal background (L_{BKG}). Thus the BB view path radiance (L_{BB_Path}) is

$$L_{BB_Path} = RVS_{BB} \cdot \epsilon_{BB} \cdot L_{BB} + (1 - RVS_{BB}) \cdot L_{SM} + RVS_{BB} \cdot (1 - \epsilon_{BB}) \cdot \epsilon_{CAV} \cdot L_{CAV} + L_{BKG} \quad (3.1)$$

where

L_{BB_Path} is the BB view path radiance.

RVS_{BB} is the normalized system response versus scan angle when the sensor views the BB.

ϵ_{BB} is the emissivity of the BB.

ϵ_{CAV} is the emissivity of the scan cavity.

L_{BB} is the radiance from the BB emission.

L_{SM} is the radiance from the scan mirror emission.

L_{CAV} is the radiance of the scan cavity reflected from the BB.

L_{BKG} is the radiance from the thermal background.

The RVS for each band and mirror side was determined pre-launch and normalized to the value at the BB view. The term $(1-RVS_{BB})$ is equivalent to the emissivity of the scan mirror at the BB view angle. This term, in general, varies with the scan angle or the angle of incidence (AOI) to the scan mirror. The cavity contribution is reflected from the BB with a reflectivity of $(1-\epsilon_{BB})$ and then by the scan mirror. This term becomes smaller with higher BB emissivity. For simplicity, we do not specify the mirror side, the spectral band, and the detector indices throughout this algorithm derivation.

Similarly, when the sensor views deep space (“zero” radiance) through the SV port, the total path radiance can be expressed as,

$$L_{SV_Path} = (1 - RVS_{SV}) \cdot L_{SM} + L_{BKG} \cdot \quad (3.2)$$

where

L_{SV_Path} is the SV view path radiance.

RVS_{SV} is the normalized system response versus scan angle when the sensor views deep space.

It includes only a scan mirror term and the background term. Note that the scan mirror terms in equation 3.1 and equation 3.2 are not the same since the RVS is a function of the AOI to the scan mirror. The path radiance difference between equations 3.1 and 3.2 is related to the sensor’s response difference between the EV and SV given by;

$$dn_{BB} = \langle DN_{BB} \rangle - \langle DN_{SV} \rangle \quad (3.3)$$

where $\langle DN_{BB} \rangle$ and $\langle DN_{SV} \rangle$ represent the frame average of the sensor’s BB and SV digital response during each scan.

A quadratic fit of BB path radiance difference vs. response difference (dn_{BB}) is written as,

$$\begin{aligned} & RVS_{BB} \cdot \epsilon_{BB} \cdot L_{BB} + (RVS_{SV} - RVS_{BB}) \cdot L_{SM} \\ & + RVS_{BB} \cdot (1 - \epsilon_{BB}) \cdot \epsilon_{CAV} \cdot L_{CAV} = a_0 + b_1 \cdot dn_{BB} + a_2 \cdot dn_{BB}^2 \end{aligned} \quad (3.4)$$

where a_0 , b_1 , and a_2 are the quadratic polynomial coefficients. Note that we purposely use b_1 instead of a_1 in the calibration equation to emphasize the on-orbit scan-by-scan computation of the linear coefficient from the sensor’s response to the BB. The radiance term, e.g. L_{BB} , is

computed using the Planck equation averaged over the detector's relative spectral response, $RSR(\lambda)$.

$$L_{BB}(T_{BB}) = \frac{\sum RSR(\lambda) \cdot Planck(\lambda, T_{BB})}{\sum RSR(\lambda)}. \quad (3.5)$$

where

λ is the wavelength of the emission incident to the given detector.

$RSR(\lambda)$ is the relative spectral response of the detector.

Planck symbolizes the Planck black body equation.

Similar expressions apply to L_{SM} and L_{CAV} . The temperatures of the blackbody, scan mirror, and instrument cavity are determined from the instrument's telemetry using conversion coefficients. Equation 3.4 is used to calculate the TEB calibration coefficient, b_1 , which is the dominant term in this quadratic algorithm. The offset and non-linear terms account for the fitting process residues or errors and small detector non-linearities over the dynamic range. They are provided in the LUTs with values determined from pre-launch calibration and updated from on-orbit BB warm-up and cool-down cycles.

Currently in the L1B algorithms (for both Terra and Aqua MODIS), the a_0 term is set to zero for B33-B36. These bands typically view scenes at temperatures (see Table 1) much lower than the BB's lowest ambient temperature of about 270K. Other parameters, such as emissivity, relative spectral response (RSR) and response versus scan-angle (RVS), determined from pre-launch calibration, are also included in the L1B LUTs.

The same approach is used for the Earth view (EV) radiance retrieval process. Using the sensor's EV and Space View (SV) response, equation 3.4 becomes

$$RVS_{EV} \cdot L_{EV} + (RVS_{SV} - RVS_{EV}) \cdot L_{SM} = a_0 + b_1 \cdot dn_{EV} + a_2 \cdot dn_{EV}^2 \quad (3.6)$$

where dn_{EV} is the sensor's EV response in digital number (DN_{EV}) with the average response to the space view ($\langle DN_{SV} \rangle$) from the same scan subtracted, that is,

$$dn_{EV} = DN_{EV} - \langle DN_{SV} \rangle. \quad (3.7)$$

Once the EV radiance is retrieved, the top-of-the-atmosphere (TOA) brightness temperature of the scene can be determined using the Planck equation. During MODIS on-orbit nominal operation, the blackbody temperature is controlled at 290K for Terra MODIS and 285K for Aqua MODIS. The BB temperature setting for each instrument corresponds to the BB temperature at which most of the pre-launch calibration and characterizations were performed in the thermal vacuum environment.

3.3 Special Considerations in the TEB Calibration Algorithm

The TEB algorithm described above applies to the Terra MODIS L1B as well as to the Aqua MODIS L1B. However, there are circumstances that do not work well with the general algorithm that assumes all detectors are functional and that all bands behave similarly. In order to achieve high quality calibration for all the bands, modifications are made to deal with cases that cannot be calibrated with the general algorithm.

Keeping separate L1B code for Terra and Aqua MODIS makes it easy to address the special features in each instrument and to update the code and the LUTs for each sensor as required. Special considerations are required for the band 21 calibration (fire detection band), for the algorithm to remove Terra MODIS photo-conductive (PC) bands' optical leak, and for the approach used to retain the Aqua MODIS bands 33, 35, and 36 on-orbit calibration when the blackbody temperature is above their saturation limits. Most of these issues were identified from pre-launch testing and characterized prior to the instruments' launches. On-orbit observations continue to track the potential changes and to monitor the performance of these special algorithms or approaches.

3.3.1 Band 21 Calibration

MODIS band 21 has low gain photovoltaic (PV) detectors with a specified center wavelength at $3.96\mu\text{m}$, a typical scene temperature of 335K, and a maximum scene temperature of 500K. This mid-wave spectral band is used primarily for fire detection. At a typical blackbody temperature of 285K for Aqua MODIS and 290K for Terra MODIS, the sensor's response, dn_{BB} , of B21 is very small. The linear calibration coefficient, b_1 , calculated from the on-board BB, fluctuates widely from scan to scan because of this low signal-to-noise ratio. Thus, the general scan-to-scan calibration method cannot provide an accurate and stable calibration for B21.

Instead of computing B21 gain on a scan-by-scan basis, a set of fixed linear coefficients is put into a LUT and used in the L1B code for B21 calibration. These linear coefficients are monitored and updated, if necessary, using on-orbit scheduled blackbody warm-up and cool-down cycles. B21 has less stringent calibration uncertainty requirements. Unlike the other PV bands, the offset and nonlinear terms of B21 have been set to zero in the TEB calibration algorithm. Since the MODIS TEB calibration is detector and mirror-side dependent, there are 20 coefficients for the 10 detectors and two mirror sides (L1B did not apply any mirror side difference in B21 prior to version 5). This fixed coefficient LUT approach is specifically designed for B21, and used in both Terra and Aqua MODIS calibration.

3.3.2 Terra MODIS PC Bands Optical Leak

MODIS bands 31-36 utilize photo-conductive (PC) detectors located on the LWIR CFPA. The other TEB bands use photovoltaic (PV) detectors. During pre-launch PFM instrument characterization, an optical leak (or crosstalk) from B31 to the other PC bands was identified. This problem was verified on-orbit from Earth scenes and lunar observations. Examples of Terra MODIS lunar view responses for band 31 and 33 are shown in Figure 10. The plot of band 31 response (detector 5) shows a smooth profile. The response profile of band 33 shows a small side

peak that is due the optical leak from band 31 as discerned from the frame offset between the two bands. The frame offset is related spectral band location on the focal plane (see Figure 3).

In order to remove the optical leak from the contaminated instrument responses (dn) for these PC bands (bands 32-36) when the sensor views the BB and the EV sectors, a special correction algorithm was developed and implemented in the Terra MODIS L1B code. It is designed to make the correction by subtracting the contributions from band 31 into the other PC bands. Assume dn^{corr} is the correct response if there were no B31 optical leak, dn^{cont} is the response with the optical leak, and $xtalk_{B31 \rightarrow B}$ is the crosstalk coefficient from B31 to a given PC band. The correction algorithm (using B32 as an example) is given by,

$$dn_{B32}^{corr}(F) = dn_{B32}^{cont}(F) - xtalk_{B31 \rightarrow B32} \cdot dn_{B31}(F + FO_{B31 \rightarrow B32}) \quad (3.8)$$

where

$dn_{B32}^{cont}(F)$ is the digital response for band 32 before correction for band 31 optical leak.

$dn_{B32}^{corr}(F)$ is the digital response for band 32 after correction for band 32 optical leak

F is the data frame number.

$FO_{B31 \rightarrow B32}$ is the data frame offset between band 31 and band 32.

$xtalk_{B31 \rightarrow B32}$ is the optical leakage coefficient for band 31 into band 32.

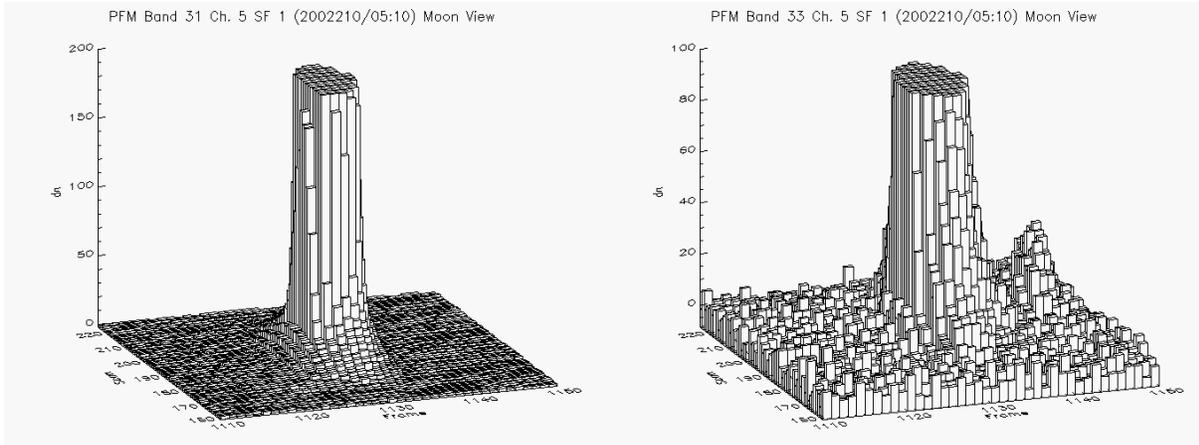


Figure 10: The Terra MODIS lunar response for B31 (left figure) and B33 (middle detectors only). The X-axis represents the data frame number, the Y-axis is the scan number, and the Z-axis is the response (dn).

This correction is applied to B32-36 on a detector-by-detector basis for both the BB calibration and the Earth scene (pixel-by-pixel) retrievals. Figure 11 shows images for band 35 with and without the PC optical leak correction. Because of the lessons learned from Terra MODIS (PFM) and subsequent improvements made in Aqua MODIS (FM1), there is no optical leak among Aqua's PC bands. Therefore, the above correction is only used in the Terra MODIS L1B calibration algorithm.

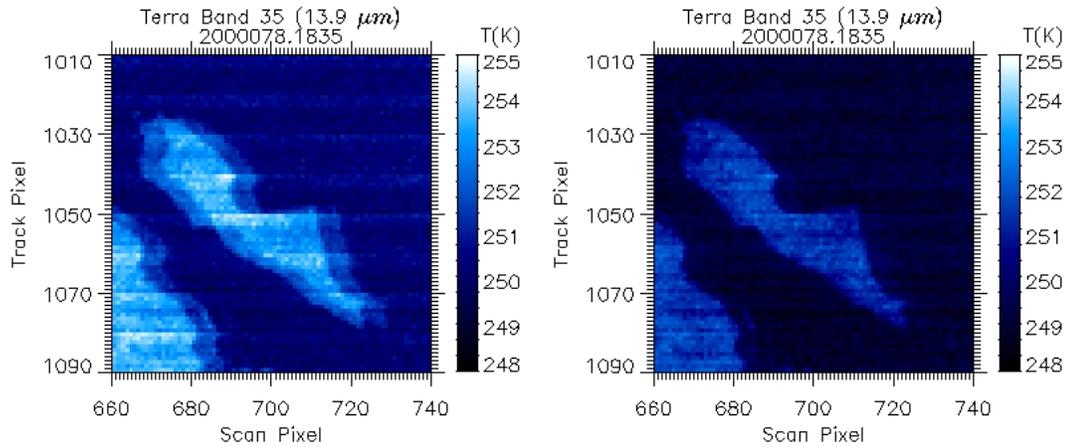


Figure 11: Band 35 Images Before and After PC Crosstalk Correction.

3.3.3 Aqua MODIS Bands 33, 35, and 36 On-orbit Calibration

On-orbit, the BB can be heated from instrument ambient to 315K. However Aqua MODIS bands 33, 35, and 36 saturate before the BB temperature reaches 315K. The saturation temperatures can vary due to instrument background and DC Restore (DCR). When the BB temperature is above the saturation limits the scan-by-scan calibration approach of equation 3.4 can no longer be used for these three bands.

In order to keep Earth view data calibrated in this situation, a set of LUTs that contain the calibration coefficients for B33, 35, and 36 are used in the L1B algorithm. These coefficients are updated, when necessary, with the most recent on-orbit detector response. This approach is similar to B21 calibration. The difference is that the LUT coefficients are only used for Aqua MODIS bands 33, 35, and 36 when the BB temperature is above each band's saturation limit while the LUT coefficients are used for B21 all the time for both Terra and Aqua MODIS. This approach for calibrating B33, 35, and 36 is only required during the occasional BB warm-up and cool-down cycle calibration procedure.

3.3.4 Moon in the SV Port

Typically, the SV signal is subtracted as in equation 4.3. However, the SV digital counts are unreliable if the Moon is in the SV port. When this occurs, no sensible radiance is retrieved and the data are flagged as unusable.

3.4 Uncertainty (TEB)

MODIS L1B data products also include uncertainty indices that are computed for all pixels, both RSB and TEB. The TEB uncertainty algorithm is based on the on-orbit calibration and scene radiance retrieval equations. It calculates the uncertainty using on-orbit observations and some

input parameters determined from pre-launch calibration and characterization. From equation 3.6, the Earth view radiometric retrieval equation for the TEB can be expressed as:

$$L_{EV} = \frac{1}{RVS_{EV}} \{a_0 + b_1 \cdot dn_{EV} + a_2 \cdot dn_{EV}^2 - (RVS_{SV} - RVS_{EV}) \cdot L_{SM}\} \quad (3.9)$$

and b_1 (calculated on-orbit scan-by-scan) by:

$$b_1 = \frac{1}{dn_{BB}} \cdot \left\{ RVS_{BB} \cdot \varepsilon_{BB} \cdot L_{BB} + (RVS_{SV} - RVS_{BB}) \cdot L_{SM} + \right. \\ \left. RVS_{BB} \cdot (1 - \varepsilon_{BB}) \cdot \varepsilon_{CAV} \cdot L_{CAV} - (a_0 + a_2 \cdot dn_{BB}^2) \right\} \quad (3.10)$$

Combining the EV radiance retrieval and BB calibration equations 3.9 and 3.10, the top of the atmosphere (TOA) Earth view retrieved radiance, L_{EV} , is simply a function of several parameters determined from pre-launch or on-orbit measurements, i.e.,

$$L_{EV} = L_{EV} \{a_0, a_2, RVS_{BB}, RVS_{SV}, RVS_{EV}, \varepsilon_{BB}, \varepsilon_{CAV}, \lambda, T_{BB}, T_{SM}, T_{CAV}, dn_{EV}, dn_{BB}\} \quad (3.11)$$

The TEB calibration total uncertainty can be computed by combining the contributions from all the factors involved in the calibration and retrieval. The contributions from higher order and cross-product terms are not considered since they are either much smaller than the first order terms or uncorrelated. In other words, by knowing the uncertainty of each parameter, the Earth view total radiance uncertainty can be computed using a small perturbation approach

$$\left(\frac{dL_{EV}}{L_{EV}} \right)^2 = \sum_i \left(\frac{L_{EV}(x_i + dx_i) - L_{EV}(x_i)}{L_{EV}(x_i)} \right)^2 \quad (3.12)$$

where x_i represents a given contributing parameter in equation 3.11 and dx_i represents the measurement error or estimated uncertainty for parameter x_i . In the current L1B uncertainty algorithm, the uncertainties of most parameters use pre-determined values characterized prior to launch, except for dn_{EV} and dn_{BB} . The on-orbit dn uncertainty for the Earth view is characterized as the intrinsic digitizing error from the Analog to Digital Converter (ADC). A fixed value of ADC uncertainty provided by a Look-up-table (band and detector dependent) is being used in the current L1B. The dn uncertainty of the Blackbody (OBC BB) is determined from the Noise Equivalent Difference in Radiance (NEdL), which is computed scan to scan in the L1B. The NEdL uncertainty accounts for the fluctuation of the sensor's response and is evaluated by calculating the Signal-to-Noise-Ratio (SNR) while viewing the BB scaled to an appropriate radiance level, i.e.

$$NEdL = L / SNR \quad (3.13)$$

Special concerns for the LWIR PC bands 11 μ m leak and band 21 calibrations are also considered in the L1B uncertainty algorithm. An uncertainty equal to half of the amount of the correction to the dn_{EV} has been assigned to those pixels in bands 32-36 for the optical leak correction on Terra MODIS. No uncertainty is assigned to bands 32-36 when the PC correction switch is turned OFF, e.g. on Aqua MODIS. The optical leak on Aqua MODIS was fixed prior to launch. MODIS band 21 is designed for fire detection with a specified maximum temperature at about 500K. Its calibration uncertainty requirement is 10%. Band 21 has been calibrated in the L1B using a fixed linear coefficient. An extra calibration uncertainty is added to its total uncertainty due to the limited dynamic range of the onboard Blackbody (operating from cavity ambient to a maximum temperature of 315K). The BB temperatures are less than the typical scene temperature viewed by Band 21.

Therefore, the total Root-Sum-Square (RSS) uncertainty of the TEB [Chiang et al., 2004], pixel by pixel, becomes:

$$\frac{dL_{EV}}{L_{EV}} = \sqrt{\sum_{i=1} \left(\frac{dL_i}{L_{EV}} \right)^2 + \left(\frac{dL_{ADC}}{L_{EV}} \right)^2 + \left(\frac{dL_{Res}}{L_{EV}} \right)^2 + \left(\frac{NEdL}{L_{EV}} \right)^2 + \left(\frac{dL_{PC}}{L_{EV}} \right)^2 + \left(\frac{dL_{B21}}{L_{EV}} \right)^2} \quad (3.14)$$

where

$\frac{dL_i}{L_{EV}}$ are uncertainties including scan mirror RVS , emissivity ε , center wavelength λ , and temperature T .

$\frac{dL_{ADC}}{L_{EV}}$ is the uncertainty of dn_{EV} associated to detector digitization process.

$\frac{dL_{Res}}{L_{EV}}$ is the residual uncertainty in a_0 and a_2 from the radiometric calibration fit.

$\frac{NEdL}{L_{EV}}$ is the uncertainty of dn_{BB} due to the noise of the detector's response when viewing the onboard calibrator Blackbody (Equation 3.13).

$\frac{dL_{PC}}{L_{EV}}$ is the optical leak correction uncertainty in the PC bands (32-36) for Terra only.

$\frac{dL_{B21}}{L_{EV}}$ is the uncertainty assigned to band 21 due to insufficient calibration dynamic range.

Perturbation analysis results show that most of the parameters embedded in the first term on the right side of the above equation (RVS , ε , λ , and T) have a near-linear smooth relationship

between the uncertainties and the Earth scene radiances, L_{EV} . Because the Earth view data calibration is angle (AOI) dependent, these uncertainties are expressed as a 4th order polynomial of Earth view frame number (equivalent to the AOI) with all the polynomial coefficients provided in the L1B LUTs.

The residual uncertainty from the radiometric calibration fit is also expressed as a 4th order polynomial of the retrieved Earth scene radiance. The polynomial coefficients (band and detector dependent) are provided in a LUT. The rest of the uncertainties are described above.

Figure 12 [Chiang et al., 2004] illustrates some of the individual uncertainties and the total Earth view radiance uncertainty determined from the individual contributions at a typical EV radiance. Table 2 [Chiang et al., 2004] shows the relationship between the Uncertainty Index (UI) output in the L1B data and the percent uncertainty (radiance) of all MODIS bands.

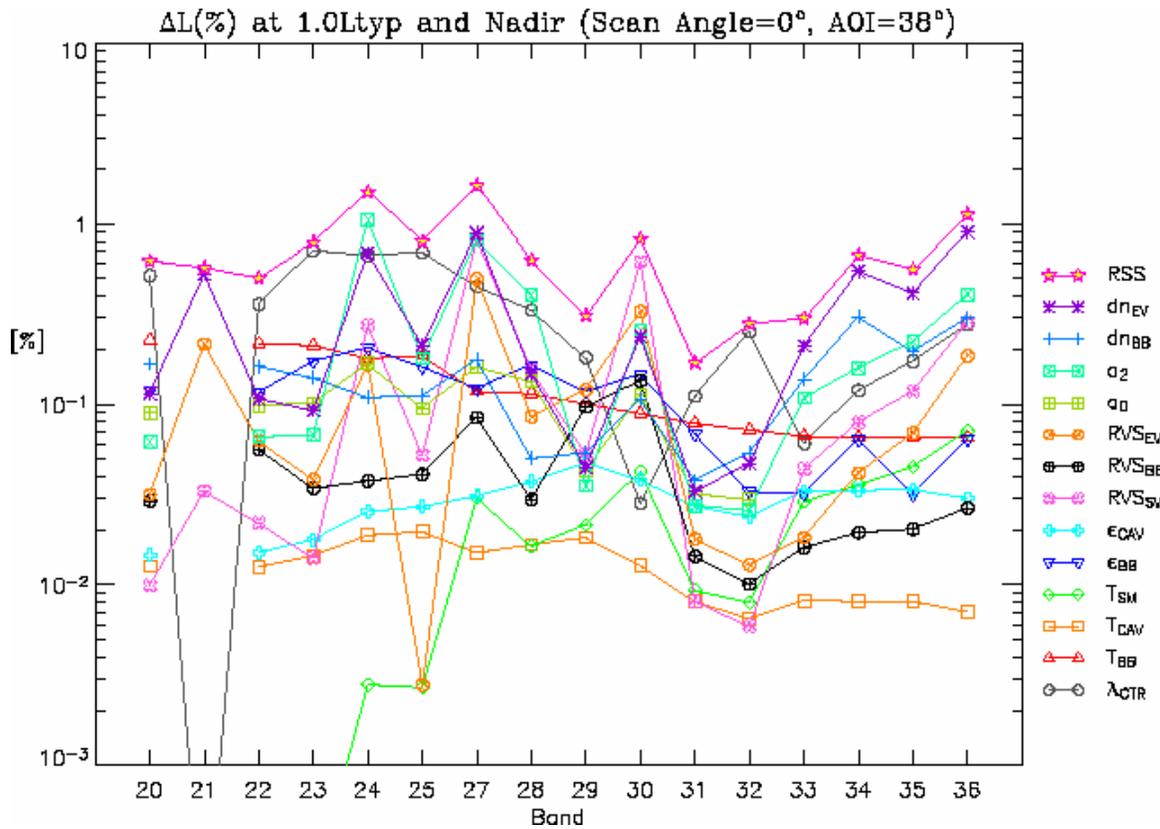


Figure 12: Earth view radiance uncertainties at a typical EV radiance.

UI	Bands 1-4, 8-19	Bands 5, 6, 7, 26	Band 20	Band 21	Bands 22-25, 27-30, 33-36	Bands 31, 32
0	1.50	1.50	0.56	2.50	0.50	0.38
1	1.73	1.83	0.69	3.21	0.64	0.48
2	2.00	2.24	0.84	4.12	0.82	0.62
3	2.30	2.73	1.02	5.29	1.06	0.79
4	2.66	3.34	1.25	6.80	1.36	1.02
5	3.06	4.08	1.53	8.73	1.75	1.31
6	3.53	4.98	1.87	11.20	2.24	1.68
7	4.08	6.08	2.28	14.39	2.88	2.16
8	4.70	7.43	2.79	18.47	3.69	2.77
9	5.43	9.07	3.40	23.72	4.74	3.56
10	6.26	11.08	4.16	30.46	6.09	4.57
11	7.22	13.54	5.08	39.11	7.82	5.87
12	8.33	16.53	6.20	50.21	10.04	7.53
13	9.61	20.20	7.57	64.48	12.90	9.67
14	11.08	24.67	9.25	82.79	16.56	12.42
15	≥ 12.79	≥ 30.13	≥ 11.30	≥ 106.30	≥ 21.26	≥ 15.95

Table 2. L1B Uncertainty Index (UI) mapped to TEB uncertainty in percent.

4. CALIBRATION ALGORITHM FOR THE REFLECTIVE SOLAR BANDS (RSB)

4.1 Pre-launch Characterization and Calibration (RSB)

Pre-launch, the MODIS reflective solar bands, B1-19 and 26, were calibrated using a 1-meter diameter spectral integrating source (SIS-100), shown in Figure 13. The combination of different lamps of the SIS-100 provided numerous radiance levels, allowing the measurement of each RSB detector's response, dynamic range, nonlinearity, and signal-to-noise ratio (SNR). A linear fit of dn vs. radiance was used for the RSB pre-launch radiometric calibration. The SIS-100 measurements were performed at the three TV instrument temperature plateaus using both the primary and redundant on-board signal control and data acquisition electronic sub-systems. This data was used to characterize system response to changes of the instrument temperature. Because the VIS and NIR FPAs are not actively controlled, their temperatures are closely coupled with (or correlated to) the instrument temperature. Other pre-launch activities included RVS characterization and polarization sensitivity measurements.



Figure 13: MODIS reflective solar bands pre-launch calibration source: SIS-100

The on-board SD panel, shown in Figure 5, is made from space-grade Spectralon™ with a near Lambertian reflectance profile in the VIS/NIR/SWIR regions. The SD bi-directional reflectance factor (BRF) was carefully characterized pre-launch by the instrument vendor using a scattering goniometer in a comparison mode with reference samples traceable to reflectance standards at the National Institute of Standards and Technology (NIST). The SD BRF measurements were made at 400nm, 500nm, 600nm, 700nm, 900nm, and 1700nm over a two-dimensional grid of nine directions of incidence, a combination of 3 elevation and 3 azimuth angles. The incident directions to the SD were chosen to cover the anticipated range that would be observed during on-orbit calibration. The viewing direction of the scan mirror to the SD was fixed during these tests. Additionally, the BRF at 2100nm was indirectly derived from the SD BRF at other wavelengths and total integrated scattering measurements of reference samples. A set of second order polynomials with a functional dependence on the incident direction to the SD described by solar zenith angle θ and solar azimuth angle ϕ was determined from these pre-launch measured BRF values. For each RSB, a second order polynomial was interpolated from the surface fits at surrounding wavelengths.

4.2 On-orbit Calibration Algorithm (RSB)

Based on the desire of the MODIS science community, the top of the atmosphere (TOA) scene reflectance factor was chosen as the primary L1B data product for the MODIS reflective solar bands (RSB). The on-orbit calibration of the reflectance factor [Xiong et al., 2002b] is based on solar observations via the instrument's on-board solar diffuser (SD).

Using a simple linear algorithm, the Earth view (EV) reflectance factor, $\rho_{EV} \cos(\theta_{EV})$, is related to the detector's response by

$$\rho_{EV} \cos(\theta_{EV}) = m_1 \cdot dn_{EV}^* \cdot d_{ES_EV}^2 \quad (4.1)$$

where

ρ_{EV} is the EV scene reflectance.

θ_{EV} is the solar zenith angle of the EV pixel.

m_1 is a calibration coefficient determined from on-orbit SD observations .

d_{ES_EV} is the Earth-Sun distance (in AU) at the time of the EV scene observation.

dn_{EV}^* is the sensor's digital response to the EV scene with background subtracted and instrument effects corrected.

Instrument effect corrections include normalizing the sensor's viewing angle and correcting for the instrumental temperature dependence via

$$dn_{EV}^* = dn_{EV} \cdot (1 + k_{Inst} \cdot \Delta T_{Inst_EV}) / RVS_{EV} \quad (4.2)$$

where

k_{Inst} is the instrument temperature correction coefficient determined pre-launch.

ΔT_{Inst_EV} is the difference between the instrument temperature at the time of EV observation and

its reference value, $\Delta T_{Inst_EV} = T_{Inst_EV} - T_{Inst_REF}$.

T_{Inst_EV} is the instrument temperature at the time of EV observation.

T_{Inst_REF} is the instrument temperature reference value, chosen pre-launch and used for deriving

k_{Inst} .

RVS_{EV} is the system level response at the scan angle of an EV pixel.

The dark background subtracted response, dn_{EV} , is computed by

$$dn_{EV} = DN_{EV} - \langle DN_{SV} \rangle \quad (4.3)$$

where DN_{EV} is the EV digital response (raw data) and $\langle DN_{SV} \rangle$ is the average SV digital response.

The SD calibration coefficient m_1 is determined by

$$m_1 = \frac{\rho_{SD} \cos(\theta_{SD})}{dn_{SD}^* \cdot d_{ES_SD}^2} \cdot \Gamma_{SDS} \cdot \Delta_{SD} \quad (4.4)$$

where

ρ_{SD} is the SD pre-launch BRDF.

dn_{SD}^* is the corrected detector response to the SD (see Eqn 4.2).

d_{ES_SD} is the Earth-Sun distance in AU at the time of the SD measurements.

Δ_{SD} is the SD degradation factor.

Γ_{SDS} is the SD screen (SDS) vignetting (transmission) function.

Except for the SD degradation factor, Δ_{SD} , and the SD screen (SDS) vignetting function, Γ_{SDS} , equation 4.4 is the same as equation 4.1 when it is applied to the SD observations.

The SD reflectance and MODIS optics transmission deteriorate on-orbit due to their exposure to sunlight [Xiong, et al., 2001 and Xiong et al., 2002c]. The SD degradation rate is tracked by the

solar diffuser stability monitor (SDSM) during each SD calibration. The SDSM alternately measures the response of the SD view and a direct Sun view through an attenuation screen of 1.44% nominal transmittance so that the responses from both views are closely matched. Nine individually filtered detectors in the SDSM monitor the SD degradation. For high gain bands (bands 8-16), a retractable solar diffuser screen (SDS) is placed in front of the SD to attenuate the direct sunlight and to avoid saturation. The SDS attenuation is represented by the vignetting (transmission) function Γ_{SDS} . The vignetting function is set to unity for bands 1-7, 17-19, and 26 when these bands are calibrated without the SDS. Note that beginning July 2, 2003 the Terra RSB calibration includes the SDS, so the vignetting function is no longer set to unity.

The RSB calibration coefficients, m_1 , are provided to the L1B software through LUTs. These coefficients are band, detector, sub-sample, and mirror side dependent. They are updated based on regularly scheduled SD/SDSM observations. The MODIS L1B RSB software also produces a radiance product. From the reflectance factor, the Earth view radiance can be calculated by

$$L_{EV} = \rho_{EV} \cos(\theta_{EV}) \cdot E_{Sun} / \pi d_{ES-EV}^2 \quad (4.5)$$

where E_{Sun} , computed at mid-granule, is the solar irradiance at $d_{ES} = 1$ AU. E_{Sun} / π is written as a global attribute in the L1B product so that the users can readily convert the RSB reflectance product to the radiance product.

4.3 Special Considerations in the RSB Calibration Algorithm

The general RSB algorithm described above applies to the Terra MODIS L1B as well as to the Aqua MODIS L1B. Each L1B code has its own set of LUTs which are instrument specific. There are only minor differences between the two sets of software.

4.3.1 SWIR Crosstalk Correction

Pre-launch and on-orbit characterization of both Terra and Aqua MODIS have shown small but non-negligible out-of-band (OOB) response in the sensors' short-wave infrared bands (SWIR). In general, the Aqua SWIR bands' OOB responses (including the thermal leaks) were much smaller than those for the Terra MODIS. In order to minimize the impact due to OOB response, a simple linear correction algorithm has been developed, tested, and implemented in the L1B codes for both Terra and Aqua MODIS.

For Terra MODIS, the SWIR band EV data and SD calibration dataset are corrected by the following expression using MODIS band 28:

$$dn'_{EV}(BDSM)_{SWIR} = dn_{EV}(BDSM)_{SWIR} - x_{oob_1}(BDSM)_{SWIR} \cdot dn_{EV}(BDM)_{B28} \quad (4.6)$$

where

$BDSM$ is a band, detector, sub-sample, and mirror side index (respectively) used in the RSB calibration.

$dn'_{EV}(BDSM)_{SWIR}$ is the response of the receiver SWIR band after correction for OOB crosstalk.

$dn_{EV}(BDSM)_{SWIR}$ is the response of the receiver SWIR band before correction for OOB crosstalk.

x_{oob_1} is the thermal leak correction coefficient.

$dn_{EV}(BDM)_{B28}$ is the response of the sender band, band 28 in this case.

Because there is no sub-sample in B28 (1km spatial resolution band with 10 detectors), B28 detector 1 is matched with B5, B6 and B7 detectors 1 and 2 (both sub-samples), B28 detector 2 is matched with B5, B6 and B7 detectors 3 and 4, etc. The same algorithm is also used in Aqua MODIS L1B with the sending band 28 replaced by band 25. The choice of the sending band is based on OOB characterization, on-orbit observations, and science test results. The correction coefficients are derived from on-orbit observations.

In addition to the thermal leak, the SWIR bands also have electronic crosstalk that has made this problem difficult to characterize and correct. In order to distinguish the electronic crosstalk among the SWIR detectors from that coming from the MWIR detectors, a special instrument activity to collect the Earth scene RSB (including SWIR bands) data during spacecraft nighttime is used. This is designated the nighttime day mode (NTDM). The thermal leak correction coefficients are derived by fitting the SWIR responses to the corresponding sending band.

4.3.2 B26 De-striping Algorithm

A de-striping algorithm was furnished by the atmospheric group at the University of Wisconsin. It only applies to MODIS band 26. It is a simple linear approach developed to remove the difference (striping) among the 10 detectors in band 26. The coefficients are derived from the L1B EV scaled integers of band 26 and band 5 after the SWIR crosstalk correction algorithm [Moeller, C., 2001].

4.3.3 Aqua Band 6 Consideration

Prior to launch, the majority of the Aqua Band 6 detectors were known to be non-functional. This information is communicated to L1B from the LUTs. As with all non-functional detectors, the bad channels are not used in the data products.

4.3.4 Moon in the SV Port

Typically, the SV signal is subtracted as in equation 4.3. However, the SV digital counts are unreliable if the Moon is in the SV port. When this occurs, the RSB use the on-board BB as the background, replacing the space view readings.

4.4 Uncertainty (RSB)

Combining Equations 4.1- 4.4, the EV reflectance factor can be expressed as

$$\rho_{EV} \cos(\theta_{EV}) = \rho_{SD} \cos(\theta_{SD}) \cdot \frac{dn_{EV} \cdot (1 + k_{INST} \cdot \Delta T_{INST_EV})}{dn_{SD} \cdot (1 + k_{INST} \cdot \Delta T_{INST_SD})} \cdot \frac{RVS_{SD}}{RVS_{EV}} \cdot \frac{d_{ES_EV}^2}{d_{ES_SD}^2} \cdot \Gamma_{SDS} \cdot \Delta_{SD} \quad (4.7)$$

When computing the uncertainty for the reflectance factor, the Earth-Sun distance term and solar zenith angle term can be ignored since they can be calculated very accurately. The relative response versus scan angle (RVS) is normalized to the SD view angle such that $RVS_{SD} = 1$. Considering

$$\frac{1 + k_{INST} \cdot \Delta T_{INST_EV}}{1 + k_{INST} \cdot \Delta T_{INST_SD}} \approx 1 + k_{INST} \cdot (T_{INST_EV} - T_{INST_SD}), \quad (4.8)$$

the RSB reflectance total uncertainty can be determined [Esposito et al., 2004] by

$$\begin{aligned} \left[\frac{\delta(\rho_{EV} \cos(\theta_{EV}))}{\rho_{EV} \cos(\theta_{EV})} \right]^2 &= \left[\frac{\delta \rho_{SD}}{\rho_{SD}} \right]^2 + \left[\frac{\delta dn_{SD}}{dn_{SD}} \right]^2 + \left[\frac{\delta dn_{EV}}{dn_{EV}} \right]^2 + \left[\frac{\delta RVS_{EV}}{RVS_{EV}} \right]^2 + \\ &\left[\frac{\delta \Gamma_{SD}}{\Gamma_{SD}} \right]^2 + \left[\frac{\delta \Delta_{SD}}{\Delta_{SD}} \right]^2 + \left[\delta k_{Inst} \cdot (T_{Inst_EV} - T_{Inst_SD}) \right]^2 + \\ &2 \left[k_{Inst} \cdot \delta T_{Inst} \right]^2 \end{aligned} \quad (4.9)$$

where

$\frac{\delta \rho_{SD}}{\rho_{SD}}$ is the SD BRF uncertainty determined from pre-launch SD characterization.

$\frac{\delta dn_{SD}}{dn_{SD}}$ is the uncertainty due to the sensor's SD response noise at the SD signal level, $1/\text{SNR}_{SD}$.

$\frac{\delta dn_{EV}}{dn_{EV}}$ is the uncertainty due to the sensor's EV response noise at the typical EV signal level, $1/\text{SNR}_{EV}$.

$\frac{\delta RVS_{EV}}{RVS_{EV}}$ is the RVS pre-launch and on-orbit measurement uncertainty.

$\frac{\delta \Gamma_{SD}}{\Gamma_{SD}}$ is the SD screen vignetting function uncertainty.

$\frac{\delta \Delta_{SD}}{\Delta_{SD}}$ is the SD degradation function uncertainty.

$\delta k_{Inst} \Delta T_{Inst_EV-Inst_SD}$ is the uncertainty associated with pre-launch characterization of k_{Inst} .

$k_{Inst} \cdot \delta T_{Inst}$ is the uncertainty associated with pre-launch characterization of T_{Inst} .

The RVS error (the 4th term) is due to the measurement uncertainty in the pre-launch and on-orbit characterization of the RVS. The SD screen vignetting function error and SD degradation error are determined on-orbit. The temperature correction related errors are typically very small.

The dominant term is the uncertainty in the solar diffuser BRF. The SD BRF was calibrated pre-launch at Raytheon’s Santa Barbara Remote Sensing facility. A comparing goniometer was used with the reference sample calibrated by NIST. The incident illumination angles were chosen to cover the anticipated range of Earth-sun on-orbit incident angles and consisted of nine incident vectors on a 3-by-3 grid. Table 3 lists all the contributing terms and their estimated values associated with the BRF uncertainty.

NIST Reference	0.50%
SBRS Characterization	0.70%
NIST Transfer to MODIS	0.50%
SD σ_{Spatial}	0.35%
Pre-launch to on-orbit	0.50%
BRF Characterization	0.50%
Spectral Interpolation	0.10%
SDSM and SDS impact	0.50%
Total Uncertainty (RSS)	1.37%

Table 3. Uncertainties of the solar diffuser BRF

Detector noise impacts calibration uncertainty in two areas: 1) during SD calibration and 2) during the EV observation. The noise contribution is dependent on the signal level.

Before July 2, 2003, the SDS vignetting function affects only the high gain bands (bands 8-16) on Terra and Aqua. These bands are primarily used for ocean color. Beginning July 2, 2003, the Terra SD door has been kept open with the SDS closed and therefore all Terra RSBs become affected by the SDS. The SDS vignetting function was derived using data from on-orbit yaw maneuvers.

The stray light and Earthshine illuminating the SD contribute to the MODIS RSB uncertainty. These contributions are strongly wavelength dependent and difficult to characterize. These factors do not appear in Equation 4.9 because the model leading to the equation assumes sunlight directly illuminates the SD. However, the magnitude of stray light and Earthshine uncertainties appear in Table 4 in the ES_SD column.

SD degradation is measured on-orbit using the Solar Diffuser Stability Monitor (SDSM). The SDSM contains nine detectors, in a Spectral Integrating Sphere (SIS) with spectral filters that are associated with nine MODIS bands. The SDSM operates as a ratioing radiometer, comparing the detector response of the SDSM viewing the solar diffuser to the detector response of the SDSM viewing the attenuated solar irradiance. The comparison removes response changes due to detector variability, solar distance, and degradation of the SDSM. Due to a design error in the SDSM, large ripples present in the Sun view data made the initial ratioing approach difficult. Consequently an alternate approach was designed by normalizing the signals to SDSM detector 9 at 940nm. The calibration coefficients correct the L1B output for SD degradation. Therefore, the uncertainty in the SD degradation needs to be included in the total uncertainty.

The temperature coefficients were derived from pre-launch calibration using data sets collected at different instrument temperatures. Typical temperature corrections are very small due to the small temperature difference between the SD calibration and the Earth observations. Therefore, the impact to the total calibration uncertainty due to this correction is very small.

The RSB RVS was measured pre-launch with its associated uncertainty estimated from analyzing all the data. The RVS is mirror side dependent. On-orbit changes in the RSB response indicated changes in the RVS. The uncertainty of the on-orbit RVS impacts the calibration accuracy. Since the RVS is normalized at the SD viewing angle, the RVS uncertainty only impacts data sets with different viewing angles. Response trending of the SD and lunar observations and mirror side ratio trending of the SRCA and EV data are used in tracking the RVS change. Potential errors in RVS tracking are attributed to RVS uncertainty and therefore included in the total uncertainty analysis.

Tables 4, 5 and 6 summarize the contributions to the uncertainty from all the terms described above for Terra MODIS RSB before July 2, 2003, Terra MODIS RSB after July 2, 2003, and Aqua MODIS RSB, respectively, at their typical EV radiance levels. The contributions from the pre-launch BRF, SDS vignetting function, Earthshine and stray light, SD degradation, detector noise at SD calibration, detector noise at EV observation, instrument temperature, instrument temperature correction coefficients, pre-launch RVS, on-orbit RVS change, and SWIR crosstalk are listed in columns 2 through 12, respectively. The total uncertainty of the reflectance factor is estimated by statistically combining all the contributors to form the RSS. The extra uncertainty added to the SWIR bands is due to electronic crosstalk in those bands. Except for the SWIR bands, most of the RSB bands are within the specification of 2% uncertainty at the typical radiance levels. The results for Aqua MODIS are comparable to Terra MODIS.

Terra MODIS RSB Uncertainty at L_{typ} (before July 2, 2003, on-orbit data from 2002262 calibration)

B	BRF	SDS	ES_SD	Δ_SD	dn_SD	dn_EV	T_inst	K_inst	RVS_1	RVS_2	SWIR	RSS
1	1.37	0.00	0.60	0.30	0.06	0.53	0.04	0.06	0.20	0.25	0.00	1.65
2	1.37	0.00	0.80	0.30	0.05	0.21	0.06	0.17	0.15	0.27	0.00	1.67
3	1.37	0.00	0.50	0.47	0.04	0.33	0.02	0.22	0.20	0.31	0.00	1.62
4	1.37	0.00	0.50	0.32	0.04	0.32	0.02	0.04	0.10	0.27	0.00	1.56
5	1.37	0.00	0.80	0.25	0.09	1.47	0.00	0.16	0.03	0.00	1.00	2.40
6	1.37	0.00	0.80	0.25	0.06	0.27	0.01	0.08	0.03	0.00	1.00	1.91
7	1.37	0.00	0.80	0.25	0.09	1.00	0.03	0.18	0.03	0.00	1.00	2.15
8	1.37	0.50	0.50	0.59	0.22	0.10	0.05	0.03	0.20	0.56	0.00	1.77
9	1.37	0.50	0.50	0.52	0.14	0.07	0.02	0.18	0.20	0.27	0.00	1.68
10	1.37	0.50	0.50	0.43	0.11	0.07	0.02	0.06	0.07	0.19	0.00	1.62
11	1.37	0.50	0.50	0.35	0.10	0.06	0.02	0.07	0.20	0.22	0.00	1.61
12	1.37	0.50	0.50	0.33	0.09	0.08	0.02	0.02	0.20	0.22	0.00	1.61
13	1.37	0.50	0.60	0.30	0.06	0.08	0.02	0.01	0.20	0.00	0.00	1.62
14	1.37	0.50	0.60	0.30	0.06	0.07	0.02	0.01	0.20	0.00	0.00	1.62
15	1.37	0.50	0.60	0.30	0.09	0.07	0.03	0.07	0.20	0.00	0.00	1.62
16	1.37	0.50	0.80	0.29	0.08	0.09	0.02	0.14	0.15	0.00	0.00	1.71
17	1.37	0.00	0.80	0.25	0.02	0.29	0.01	0.03	0.10	0.00	0.00	1.64
18	1.37	0.00	0.80	0.25	0.03	1.13	0.02	0.09	0.15	0.00	0.00	1.97
19	1.37	0.00	0.80	0.25	0.02	0.20	0.01	0.02	0.15	0.00	0.00	1.63
26	1.37	0.00	0.80	0.25	0.04	0.41	0.02	0.15	0.03	0.00	1.00	1.94

Table 4. Summary of Terra MODIS RSB calibration uncertainty at typical radiance level for calibration before July 2, 2003 (extra 1% uncertainty applied to SWIR bands 5-7 and 26)

Terra MODIS RSB Uncertainty at Ltyp (after July 2, 2003, on-orbit data from 2004160 calibration)

B	BRF	SDS	ES_SD	Δ SD	dn_SD	dn_EV	T_inst	K_inst	RVS_1	RVS_2	SWIR	RSS
1	1.37	0.50	0.60	0.30	0.57	0.51	0.04	0.06	0.20	0.25	0.00	1.81
2	1.37	0.50	0.80	0.30	0.36	0.19	0.06	0.17	0.15	0.27	0.00	1.78
3	1.37	0.50	0.50	0.47	0.48	0.32	0.02	0.22	0.20	0.31	0.00	1.76
4	1.37	0.50	0.50	0.32	0.40	0.31	0.02	0.04	0.10	0.27	0.00	1.68
5	1.37	0.50	0.80	0.25	1.12	1.22	0.00	0.16	0.03	0.00	1.00	2.57
6	1.37	0.50	0.80	0.25	0.63	0.27	0.01	0.08	0.03	0.00	1.00	2.08
7	1.37	0.50	0.80	0.25	1.00	1.02	0.03	0.18	0.03	0.00	1.00	2.43
8	1.37	0.50	0.50	0.59	0.27	0.11	0.05	0.03	0.20	0.56	0.00	1.78
9	1.37	0.50	0.50	0.52	0.14	0.07	0.02	0.18	0.20	0.27	0.00	1.68
10	1.37	0.50	0.50	0.43	0.10	0.07	0.02	0.06	0.07	0.19	0.00	1.62
11	1.37	0.50	0.50	0.35	0.09	0.08	0.02	0.07	0.20	0.22	0.00	1.61
12	1.37	0.50	0.50	0.33	0.10	0.11	0.02	0.02	0.20	0.22	0.00	1.61
13	1.37	0.50	0.60	0.30	0.06	0.10	0.02	0.01	0.20	0.00	0.00	1.62
14	1.37	0.50	0.60	0.30	0.05	0.10	0.02	0.01	0.20	0.00	0.00	1.62
15	1.37	0.50	0.60	0.30	0.07	0.10	0.03	0.07	0.20	0.00	0.00	1.62
16	1.37	0.50	0.80	0.29	0.06	0.11	0.02	0.14	0.15	0.00	0.00	1.71
17	1.37	0.50	0.80	0.25	0.23	0.27	0.01	0.03	0.10	0.00	0.00	1.72
18	1.37	0.50	0.80	0.25	0.34	1.04	0.02	0.09	0.15	0.00	0.00	2.02
19	1.37	0.50	0.80	0.25	0.26	0.19	0.01	0.02	0.15	0.00	0.00	1.72
26	1.37	0.50	0.80	0.25	0.54	0.39	0.02	0.15	0.03	0.00	1.00	2.07

Table 5. Summary of Terra MODIS RSB calibration uncertainty at typical radiance level for calibration after July 2, 2003 (extra 1% uncertainty applied to SWIR bands 5-7 and 26)

Aqua MODIS RSB Uncertainty at Ltyp (on-orbit data from 2004159 calibration)

B	BRF	SDS	ES_SD	Δ SD	dn_SD	dn_EV	T_inst	K_inst	RVS_1	RVS_2	SWIR	RSS
1	1.37	0.00	0.60	0.22	0.05	0.53	0.06	0.09	0.25	0.22	0.00	1.64
2	1.37	0.00	0.80	0.10	0.05	0.20	0.05	0.09	0.50	0.10	0.00	1.69
3	1.37	0.00	0.50	0.22	0.04	0.33	0.04	0.06	0.47	0.15	0.00	1.59
4	1.37	0.00	0.50	0.21	0.04	0.32	0.03	0.04	0.47	0.11	0.00	1.59
5	1.37	0.00	0.80	0.04	0.07	0.68	0.02	0.07	0.03	0.00	0.50	1.80
6	1.37	0.00	0.80	0.04	0.05	0.21	0.02	0.04	0.03	0.00	0.50	1.68
7	1.37	0.00	0.80	0.04	0.07	0.67	0.02	0.13	0.03	0.00	0.50	1.80
8	1.37	0.50	0.50	0.34	0.20	0.09	0.08	0.03	0.16	0.28	0.00	1.63
9	1.37	0.50	0.50	0.27	0.13	0.07	0.04	0.01	0.13	0.20	0.00	1.59
10	1.37	0.50	0.50	0.20	0.10	0.07	0.03	0.01	0.14	0.13	0.00	1.57
11	1.37	0.50	0.50	0.18	0.09	0.07	0.03	0.02	0.16	0.12	0.00	1.57
12	1.37	0.50	0.50	0.20	0.09	0.09	0.03	0.02	0.17	0.11	0.00	1.57
13	1.37	0.50	0.60	0.21	0.06	0.09	0.04	0.09	0.22	0.00	0.00	1.61
14	1.37	0.50	0.60	0.21	0.05	0.09	0.05	0.13	0.21	0.00	0.00	1.61
15	1.37	0.50	0.60	0.18	0.07	0.09	0.06	0.14	0.23	0.00	0.00	1.62
16	1.37	0.50	0.80	0.09	0.07	0.10	0.07	0.23	0.23	0.00	0.00	1.70
17	1.37	0.00	0.80	0.04	0.02	0.28	0.03	0.07	0.20	0.06	0.00	1.63
18	1.37	0.00	0.80	0.04	0.03	1.11	0.03	0.08	0.23	0.08	0.00	1.95
19	1.37	0.00	0.80	0.04	0.02	0.20	0.02	0.05	0.23	0.07	0.00	1.62
26	1.37	0.00	0.80	0.04	0.04	0.37	0.04	0.37	0.03	0.00	0.50	1.75

Table 6. Summary of Aqua MODIS RSB calibration uncertainty at typical radiance level (extra 0.5% uncertainty applied to SWIR bands 5-7 and 26)

5. LEVEL 1B DATA PRODUCTS AND ALGORITHM IMPLEMENTATION

5.1 L1B Data Products

The sensors' raw data are transmitted to ground stations, such as the one at White Sands in New Mexico, through the Tracking Data Relay Satellite System (TDRSS) and then sent to the EOS Data and Operations System (EDOS). At the Goddard Space Flight Center Distributed Active Archive Center (GDAAC), the sensor's original binary data files (Level 0) from the EDOS are reformatted and separated into Level 1A (L1A) granules using EOS specific Hierarchical Data Format (HDF). Each L1A granule contains 5 minutes of data, consisting of the sensor's response in digital numbers (DNs) as well as other engineering and telemetry information. These are the principal inputs to the Level 1B (L1B) process. Other inputs include a geolocation file and a set of L1B Look-Up Tables (LUTs) that provide parameters determined during pre-launch and on-orbit calibration and characterization. The MODIS L1B products are distributed through the GDAAC.

L1B output consists of calibrated Earth View (EV) data for all 36 spectral bands, organized in three HDF files corresponding to MODIS' three spatial resolutions, and associated metadata files. These files serve as the common input for all higher-level science algorithms. The L1B process also produces a separate file containing on-board calibration data sets and key instrument telemetry. The latter does not contain the EV sector data and is primarily used by MCST analysts to perform instrument on-orbit calibration and to monitor the instrument's status.

The Level 1B calibrated EV data products include top of the atmosphere (TOA) reflectance factors for the RSBs, TOA radiances for both the RSBs and TEBs, associated uncertainty indices and data quality flags. To reduce file size, the calibrated Earth view data are stored as 16-bit unsigned integers coupled with associated scale and offset terms in three separate HDF files (see Appendices B and C). This approach allows the user to reconstruct calibrated radiance values for all MODIS bands as well as calibrated reflectance values for the Reflective Solar Bands (RSBs). Associated uncertainty values are included as unsigned 8-bit integers with coefficients provided to reconstruct the percent uncertainty. A scan-by-scan 32-bit data quality flag and a granule level 8-bit detector quality flag for each of the 490 detectors are included as part of each file's metadata.

5.2 L1B Algorithm Implementation

MODIS L1B software provides calibration for all TEB and RSB detectors. Calibration is performed for each band, detector, sub-sample (for the sub-kilometer resolution bands 1-7), and mirror side (BDSM), and thus is on a pixel-by-pixel basis for all MODIS detectors. The radiometric calibration algorithm is divided into two major modules in the L1B software: one for the thermal emissive bands and the other for the reflective solar bands. The RSB calibration uses some processed data from TEB calibration and is therefore performed after the TEB calibration. Both TEB and RSB calibration modules in the L1B process are executed after L1B pre-processing in which the calibration coefficients are either calculated from on-orbit data sets or determined from the associated LUT inputs.

Figure 14 [Xiong et al., 2005b] is a simplified flow diagram that illustrates the core of the TEB calibration algorithm: computing the EV radiance, converting radiance to a scaled integer (SI), and computing the uncertainty index (UI). For each scan of EV data, this process loops through bands, detectors, and frames. The data quality flags are assigned for each scan of the data. An optical crosstalk (PCX) correction algorithm, which applies only to bands 32-36, is included in the TEB calibration. Based on the sensors' calibration and characterization results, the PCX switch is set to "ON" for Terra MODIS L1B and "OFF" for Aqua MODIS L1B. The PCX coefficients are provided by the LUTs. MODIS Band 21, which is primarily used for fire detection and has extremely low gain, also uses calibration coefficients from the LUTs. For Aqua MODIS, LUTs also provide calibration coefficients for bands 33, 35, and 36 when the on-board calibrator blackbody radiance (temperature) is above these bands' saturation limits.

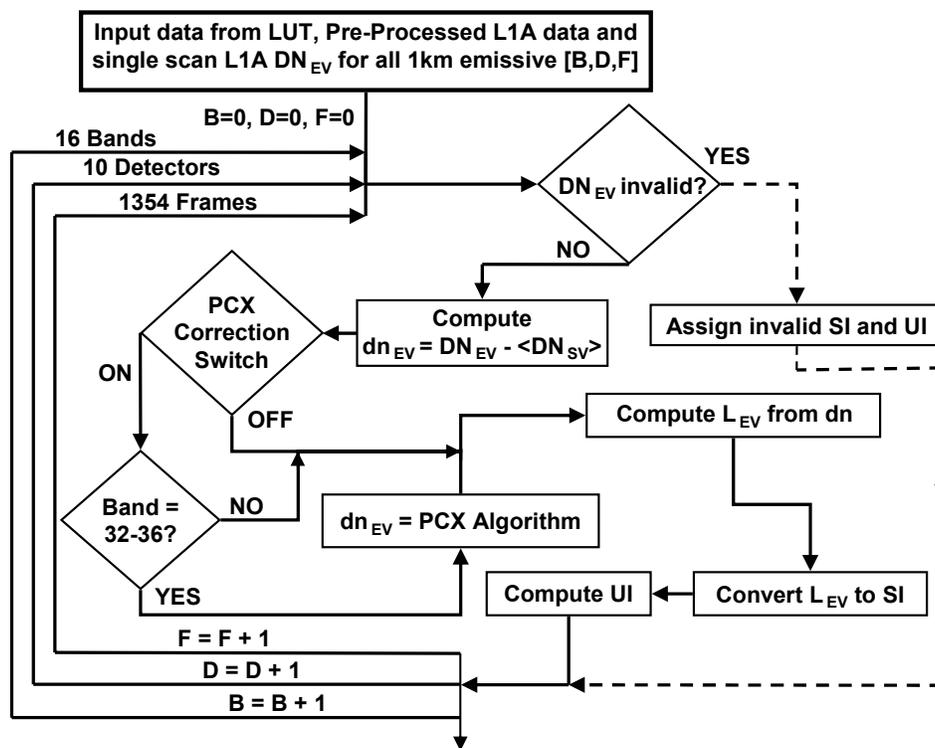


Figure 14: Thermal Emissive Band L1B Flow Diagram

Figure 15 [Xiong et al., 2005b] shows the flow diagram of the RSB calibration module which is executed after the TEB calibration module. Compared to the TEB calibration, an extra loop is added for the bands/detectors with sub-frames (Bands 1-7). For the Short-Wave Infrared (SWIR) bands (5-7 and 26), the algorithm includes a thermal leak correction that is applied to both the Terra and Aqua MODIS data. Some of the data used in the SWIR thermal leak correction comes from the already processed TEB data.

Following the radiometric calibration of each granule, a set of band dependent scale and offset terms are calculated and written into L1B output as scientific data set (SDS) attributes that are

used to reconstruct the radiance and reflectance values from the scaled integers. In each data set, the RSB radiance values can also be derived from the reflectance factors using the global attributes “Earth-Sun Distance” and “Solar Irradiance on RSB Detectors over pi”. The solar irradiance is weighted by the relative spectral response (RSR) of each RSB detector. The MODIS Level 1B Product User’s Guide provides the detailed description of this process [MCST, 2003c].

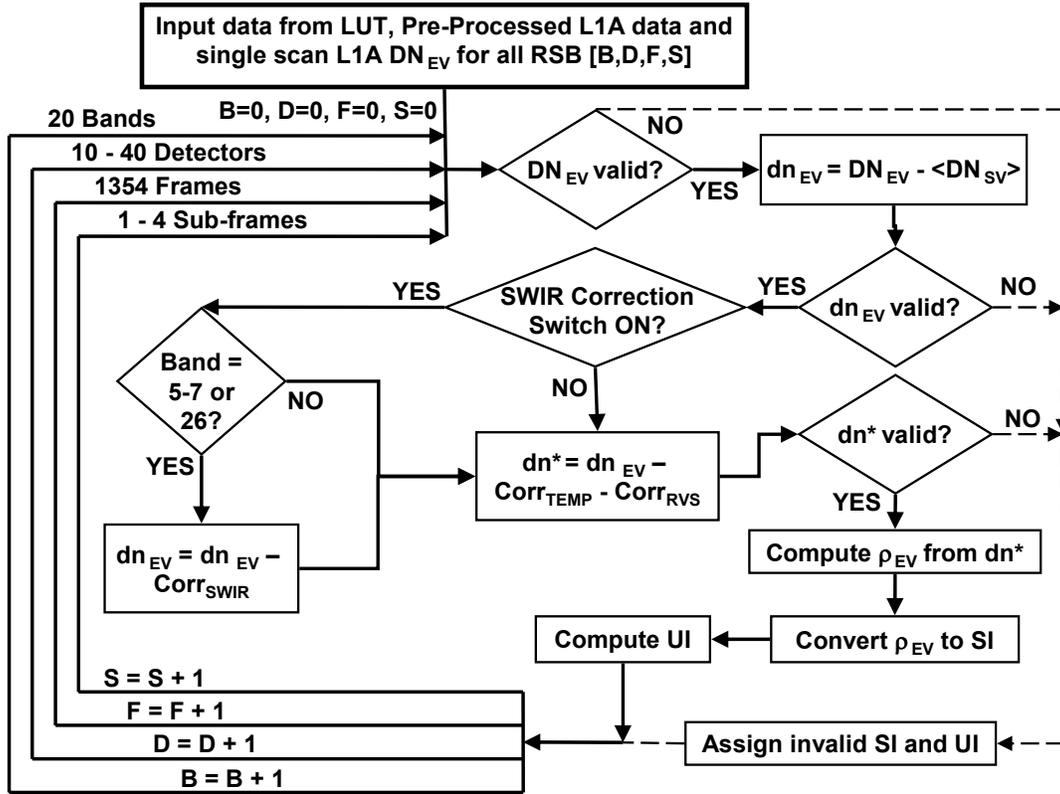


Figure 15: Reflective Solar Band L1B flow diagram

5.3 L1B Data Product Retrieval

The calibrated MODIS Earth view data are stored as scaled integer (SI) scientific data sets (SDS) within the Level 1B output files. The output files also contain scale and offset terms stored as attributes which enable the user to convert the calibrated data to TOA radiances and, in the case of the Reflective Solar Bands, to TOA reflectance factors. The following expressions are used to convert the SI to the scene TOA radiances or reflectance factors.

For the TEB radiance:

$$Radiance = radiance_scales * (SI - radiance_offsets). \quad (5.1)$$

For the RSB reflectance factor:

$$Reflectance = reflectance_scales * (SI - reflectance_offsets). \quad (5.2)$$

For the RSB radiance:

$$Radiance = Reflectance \cdot \frac{Solar_Irradiance_over_pi}{(Earth - Sun_Distance)^2}. \quad (5.3)$$

For the thermal emissive bands, the radiance scale and offset terms are used to reconstruct the radiance values calculated within the Level 1B TEB calibration algorithm. For the reflective solar bands, the reflectance scales and offsets may be used to reconstruct the reflectance factors calculated within the RSB calibration algorithm, but use of the radiance scales and offsets for the reflective solar bands will result in only approximate radiance retrievals. This is due to the fact that the reflective radiance scales are derived using a band-averaged value of the solar irradiance, which actually varies from detector to detector due to the individual detector's relative spectral response (RSR) function. An alternative method to derive RSB radiances, which yields more precise results, is to use the global attributes "Earth-Sun Distance" and "Solar Irradiance on RSB Detectors over pi" to reconstruct the radiances directly from reflectance values. This method is given by equation 5.3.

To cover a broad range of uncertainty in percentage for the retrieved EV products, an exponential approach is used. Two SDS attributes, "specified_uncertainty" and "scaling_factor" in equation 5.4, are used to convert the Uncertainty Index (UI) back to the percentage uncertainty. Additional information is provided in the MODIS Level 1B Product User's Guide [MCST, 2003c].

$$Uncertainty\ (\%) = Specified_uncertainty \cdot \exp\left(\frac{UI}{Scaling_factor}\right). \quad (5.4)$$

6. SUMMARY

MODIS, a key instrument for the NASA's EOS missions, is currently operating on both the Terra and Aqua spacecraft, providing continuous global data sets from complementing morning and afternoon observations of the Earth's land, oceans, and atmosphere. MODIS has 36 spectral bands covering spectral regions from the VIS to LWIR (0.41 to 14.5 μ m), taking observations at 250m, 500m, and 1km nadir spatial resolutions. Ongoing monitoring of instrument operation and performance of comprehensive calibration and characterization has shown both Terra and Aqua MODIS are performing well. The mature, validated MODIS L1B algorithms are used to generate calibrated L1B products. Updates that account for changes in sensor performance are implemented via numerous L1B LUTs. The two MODIS instruments are identical in many aspects, allowing a common calibration approach for generation of the Level 1B data products with special treatments added in the code to account for differences in the two sensors. For additional information on the MODIS instrument calibration and characterization, current instrument status, L1B code changes, and LUT updates, please use the MODIS Characterization Support Team (MCST) web page (<http://www.mcst.ssai.biz/mcstweb/index.html>).

7. REFERENCES

- Barker, J., J. Harnden, H. Montgomery, P. Anuta, G. Kavaran, E. Knight, T. Bryant, A. McKay, J. Smid, and D. Knowles, MODIS Level 1 Geolocation, Characterization and Calibration Algorithm Theoretical Basis Document, Version 1, Goddard Space Flight Center, Greenbelt, MD., 1994.
- Barnes, W. L., T. S. Pagano, and V. V. Salomonson, Pre-launch characteristics of the Moderate Resolution Imaging Spectroradiometer (MODIS) on EOS-AM1, *IEEE Trans. Geosci. Remote Sensing*, 36, pp. 1088-1100, 1998.
- Barnes, W., X. Xiong, B. Guenther, and V. Salomonson, Development, Characterization and Performance of the EOS MODIS Sensors, *Proceedings of SPIE – Earth Observing Systems VIII*, W. L. Barnes, ed., 5151, pp.337-345, 2003.
- Chiang, K., X. Xiong, A. Wu, and W. Barnes, MODIS thermal emissive bands calibration uncertainty analysis, *Proceedings of SPIE – Earth Observing Systems IX*, W. L. Barnes and J. Butler, ed., 5542, 2004.
- Esposito, J. X. Xiong, A. Wu, J. Sun, and W. Barnes, MODIS reflective bands calibration uncertainty analysis, *Proceedings of SPIE – Earth Observing Systems IX*, W. L. Barnes and J. Butler, ed., 5542, 2004.
- Goldberg, I. L., Two-point calibration of non-linear PC HgCdTe channels, *Infrared Phys. Technol.*, 36, 1995.
- GSFC, Specification for the Moderate-Resolution Imaging Spectroradiometer (MODIS), GSFC 422-20-02, Rev. A, March 24, 1993.
- Guenther, B., H. Montgomery, P. Abel, J. Barker, W. Barnes, P. Anuta, J. Baden, L. Carpenter, E. Knight, G. Godden, M. Hopkins, M. Jones, D. Knowles, S. Sinkfield, B. Veiga, N. Che, L. Goldberg, M. Maxwell, T. Zukowski, T. Pagano, N. Therrien, and J. Young, MODIS Level 1B Algorithm Theoretical Basis Document [MOD-02], GSFC, Greenbelt Maryland, 1995.
- Guenther, B. W. Barnes, E. Knight, J. Barker, J. Harnden, G. Godden, H. Montgomery, and P. Abel, MODIS Calibration: A Brief Review of the Strategy for the At-Launch Calibration Approach, *J. Atmos. Ocean. Tech.*, 13, 274-285, 1996.
- Isaacman, A. G. Toller, B. Guenther, W. Barnes, and X. Xiong, MODIS Level 1B Calibration and Data Products, *Proceedings of SPIE – Earth Observing Systems VIII*, 5151, 552-562, 2003.
- MCST, MODIS Level 1B Algorithm Theoretical Basis Document, Version 2, Goddard Space Flight Center, Greenbelt MD, May 1997.
- MCST, MODIS Level 1B In-Granule Calibration Code (MOD_PRO2) High-Level Design, Goddard Space Flight Center, Greenbelt MD, 2003a.

MCST, MODIS Level 1B Product Data Dictionary, Goddard Space Flight Center, Greenbelt MD 2003b.

MCST, MODIS Level 1B Product User's Guide, Goddard Space Flight Center, Greenbelt MD, 2003c.

MCST, MODIS Level 1B Calibration and Data Products, Goddard Space Flight Center, Greenbelt MD, 2003d.

Moeller, C., MODIS B26 Performance Part III, Influence of B5 (1.2 μm) on B26 (1.38 μm), MODIS Science Team Meeting, 12/17/2001.

Nishihama, M., R. Wolfe, D. Solomon, F. Patt, J. Blanchette, A. Fleig, and E. Masuoka, MODIS Level 1A Earth Location: Algorithm Theoretical Basis Document Version 3.0, NASA Goddard Space Flight Center, Greenbelt MD, 1997.

Salomonson, V., W. Barnes, and E. Masuoka, Introduction to MODIS and an overview of associated activities, Earth Science Satellite Remote Sensing, J. Qu, W. Gao, M. Kafatos, R. Murphy, and V. Salomonson, eds., Vol. I, Chapter 2, Springer-Verlag, 2005.

SBRS, Operational In-Flight Calibrations Procedures, CDRL 404, Hughes Santa Barbara Research Center, Santa Barbara California, 1993.

SBRS, Moderate Resolution Imaging Spectroradiometer (MODIS) Program Calibration Management Plan, SBRC, Goleta, California, 1994.

Xiong, X., J. Esposito, J. Sun, C. Pan, B. Guenther, and W. Barnes, Degradation of MODIS Optics and Its Reflective Solar Bands Calibration, *Proceedings of SPIE – Sensors, Systems, and Next Generation Satellite V*, 4540, 62-70, 2001.

Xiong, X., K. Chiang, B. Guenther, and W. L. Barnes, MODIS Thermal Emissive Bands Calibration Algorithm and On-orbit Performance, *Proceedings of SPIE – Optical Remote Sensing of the Atmosphere and Clouds III*, 4891, 392-401, 2002a.

Xiong, X., J. Sun, J. Esposito, B. Guenther, and W. Barnes, MODIS Reflective Solar Bands Calibration Algorithm and On-orbit Performance, *Proceedings of SPIE – Optical Remote Sensing of the Atmosphere and Clouds III*, 4891, 392-401, 2002b.

Xiong, X., A. Wu, J. Esposito, J. Sun, N. Che, B. Guenther, W. Barnes, Trending Results of MODIS Optics On-orbit Degradation, *Proceedings of SPIE – Earth Observing Systems VII*, 4814, 2002c.

Xiong, X., and W. Barnes, MODIS calibration and characterization, Earth Science Satellite Remote Sensing, J. Qu, W. Gao, M. Kafatos, R. Murphy, and V. Salomonson, eds., Vol. I, Chapter 4, Springer-Verlag, 2005a.

Xiong, X., A. Isaacman, and W. Barnes, MODIS level 1B products, Earth Science Satellite Remote Sensing, J. Qu, W. Gao, M. Kafatos, R. Murphy, and V. Salomonson, eds., Vol. II, Chapter 6, Springer-Verlag, 2005b.

Young, J. B., SRCA along track SBR Modeling/algorithm, PL3095-No4214, August 24, 1995.

Young, J. B., SRCA Spectral Calibration Methodology, PL3095-No4744, March 20, 1995.

8. APPENDIX A: MODIS SPECIFICATIONS AND DESIGN PARAMETERS

Orbit: 705 km, 10:30 a.m., descending node (Terra) or 1:30 p.m. ascending node (Aqua) sun-synchronous, near-polar, circular					
Scan Rate: 20.3 rpm, cross track					
Swath Dimensions: 2330 km (across track) by 10 km (along track at nadir)					
Telescope: 17.78 cm diam. Off-axis, afocal (collimated), with intermediate field stop					
Size, Weight, and Power: 1.0 x 1.6 x 1.0 m, 250 kg, 225 W (orbital average)					
Data Rate: 11 Mbps (peak daytime)					
Quantization: 12 bits					
Spatial Resolution: At Nadir: 250 m (bands 1-2), 500 m (bands 3-7), 1000 m (bands 8-36)					
Design Life: 5 years					
Primary Use	Band	CW ¹	Bandwidth ²	Spectral Radiance ³	Required SNR ⁴
Land/Cloud Boundaries	1	645	620-670	21.8	128
	2	858	841-876	24.7	201
Land/Cloud Properties	3	469	459-479	35.3	243
	4	555	545-565	29.0	228
	5	1240	1230-1250	5.4	74
	6	1640	1628-1652	7.3	275
	7	2130	2105-2155	1.0	110
Ocean Color/Phytoplankton/ Biogeochemistry	8	412	405-420	44.9	880
	9	443	438-448	41.9	838
	10	488	483-493	32.1	802
	11	531	526-536	27.9	754
	12	551	546-556	21.0	750
	13	667	662-672	9.5	910
	14	678	673-683	8.7	1087
	15	748	743-753	10.2	586
	16	869	862-877	6.2	516
Atmospheric Water Vapor	17	905	890-920	10.0	167
	18	936	931-941	3.6	57
	19	940	915-965	15.0	250
Primary Use	Band	CW ¹	Bandwidth ²	Spectral Radiance ³	Required NE Δ T(K) ⁵
Surface/Cloud Temperature	20	3.75	3.660-3.840	0.45	0.05
	21	3.96	3.929-3.989	2.38	0.20
	22	3.96	3.929-3.989	0.67	0.07
	23	4.05	4.020-4.080	0.79	0.07
Atmospheric Temperature	24	4.47	4.433-4.498	0.17	0.25
	25	4.52	4.482-4.549	0.59	0.25
Cirrus Clouds	26	1375	1.360-1.390	6.00	150 ⁴
Water Vapor	27	6.72	6.535-6.895	1.16	0.25
	28	7.33	7.175-7.475	2.18	0.25
	29	8.55	8.400-8.700	9.58	0.05
Ozone	30	9.73	9.580-9.880	3.69	0.25
Surface/Cloud Temperature	31	11.03	10.780-11.280	9.55	0.05
	32	12.02	11.770-12.270	8.94	0.05
Cloud Top Altitude	33	13.34	13.185-13.485	4.52	0.25
	34	13.64	13.485-13.785	3.76	0.25
	35	13.94	13.785-14.085	3.11	0.25
	36	14.24	14.085-14.385	2.08	0.35
<ol style="list-style-type: none"> 1. Central Wavelength (nm for bands 1-19, 26; μm for bands 20-25, 27-36) 2. Units: Bands 1 to 19, nm; Bands 20-36 μm 3. ($W/m^2 \mu$m sr) Typical Earth scene radiance, L_{typ} 4. SNR = Signal-to-noise ratio {Performance goal is 30% -40% better than required.} 5. NEΔT = Noise-equivalent temperature difference 					

9. APPENDIX B: L1B TEB SCALED INTEGERS

In the L1B code, the TEB radiance produced for each Earth view (EV) pixel is expressed in a 32-bit floating-point format. It is output as a 16-bit scaled integer (SI) in the Scientific Data Sets (SDS) of the Hierarchical Data Format (HDF) for the L1B data products. The dynamic range of valid data in SI is [0, 32767] and any values greater than 32767 represent invalid data. To convert the SI back to the calibrated radiance for a given pixel, simply use the following expression:

$$L = radiance_scales(B)[SI - radiance_offsets(B)]. \quad (9.1)$$

where

$$radiance_scales(B) = [L_{MAX}(B) - L_{MIN}(B)] / 32767 \quad (9.2)$$

and

$$radiance_offsets(B) = -32767 L_{MIN}(B) / [L_{MAX}(B) - L_{MIN}(B)] \quad (9.3)$$

The values of radiance_scales(B) and radiance_offsets(B) are computed inside L1B based on the $L_{MAX}(B)$ and $L_{MIN}(B)$ values of each band stored in the L1B LUTs. They are written as attributes to the SDS.

10. APPENDIX C: L1B RSB SCALED INTEGERS

In L1B, the RSB product is Earth view reflectance, expressed in a 32-bit floating-point format for each pixel. As with the TEB radiance, the RSB reflectance is output as a 16-bit SI in the SDS of the HDF. The reflectance can be calculated from the SI by

$$\rho_{EV} \cos(\theta_{EV}) = reflectance_scale(B)[SI - reflectance_offset(B)], \quad (10.1)$$

where $\rho \cos(\theta_{EV})$ is the EV scene reflectance factor for the EV pixel at solar zenith angle θ_{EV} . reflectance_scale(B) and reflectance_offset(B) are written as attributes to the SDS. With the reflectance, the RSB radiance can be obtained by

$$L_{EV} = \rho_{EV} \cos(\theta_{EV}) E_{sun} / \pi d_{ES-EV}^2 \quad (10.2)$$

where E_{sun} is the solar irradiance. The quantity E_{sun}/π for each detector is written as a global attribute to the SDS.

11. APPENDIX D: UNCERTAINTY INDEX IN THE L1B PRODUCTS

After the radiometric uncertainty calculation, a Root-Sum-Square (RSS) approach is completed and the uncertainty is written to the L1B products in terms of the Uncertainty Index (UI) for each pixel, with an integer ranging from 0 to 15. The UI is computed in the L1B using the following expression:

$$UI = scaling_factor[B] \cdot \ln \left(\frac{RSS}{specified_uncertainty[B]} \right) \quad (11.1)$$

The use of nonlinear log scaling allows a broad range of uncertainty to be covered while an adequate resolution for small uncertainties is still retained. Table 2 lists the band dependent scaling_factor[B] and specified_uncertainty[B] values. They are provided from LUT inputs. The RSS uncertainty is computed dynamically for each pixel in each scan as described above.

12. APPENDIX E: ACRONYMS AND ABBREVIATIONS

a0	Temperature-dependent Offset for TEB Calibration
a2	Temperature-dependent Quadratic Coefficient for TEB Calibration
A/D	Analog-to-Digital Converter
AM-1	Ante Meridian EOS Platform (Terra)
AOI	Angle of Incidence
Aqua	FM1 satellite that houses MODIS
ATBD	Algorithm Theoretical Basis Document
AU	Astronomical Unit
AVHRR	Advanced Very High Resolution Radiometer
b_1	Linear Gain Term for TEB Calibration
BB	OBC Blackbody
BDSM	Band, Detector, Subframe (sample), Mirror side
BCS	Blackbody Calibration Source
BRDF	Bi-Directional Reflectance Distribution Function
BRF	Bi-Directional Reflectance Factor
CFPA	Cold Focal Plane Assembly
CLAM	Cooler Located Amplifier Module
CZCS	Coastal Zone Color Scanner
DAAC	Distributed Active Archive Center
DC	Direct Current
DCR	DC Restore
DN	Digital Number. Raw signal recorded including SV with DCR.
dn	DN Corrected for Electronic Background (i.e., DN-SV)
dn*	DN Corrected for Instrumental Effects and Electronic Background
dn**	For RSB, dn* as Scaled to the SI Within a Defined Dynamic Range so that a Single Set of Calibration Parameters Applies to Every Detector in a Band.
ECAL	Electronics Calibration
EM	Engineering Model
Esun	RSR-Weighted Solar Irradiance
EV	Earth view
FAM	Forward Viewing Analog Module
FDDI	Fiber Distributed Data Interface
FIFO	Firs-In First-Out
FM-1	Flight Model-1 (Aqua)
FPA	Focal Plane Assembly
Frame Number	1-1354. Linearly Related to Scan Angle. An Along-Scan Pixel.
GDAAC	Goddard DAAC
Granule	A Data Processing Time Unit (5 minutes)
HIRS	High Resolution Infrared Spectrometer
IFOV	Instantaneous Field of View
IR	Infrared
K	Kelvin
L	Radiance
L1B	Level 1B (calibrated, geo-located data)
LUT	Look-Up Table
LWIR	Long Wavelength Infrared
m_1	Reflectance Calibration Linear Term
MCST	MODIS Characterization Support Team
MEM	Main Electronics Module
MODIS	Moderate-Resolution Imaging Spectroradiometer
MWIR	Medium Wavelength Infrared
NASA	National Aeronautics and Space Administration
NIR	Near Infrared
NIST	National Institute of Standards and Technology

nm	Nanometers (10^{-9} meters)
NOAA	National Oceanic and Atmospheric Administration
OBC	On-Board Calibrator
OOB	Out-of-Band
PC	Photoconductive
PFM	Proto-Flight Model (Terra)
PM-1	Post Meridian EOS Platform (Aqua)
PV	Photovoltaic
RSB	Reflective Solar Band (1-19,26)
RSR	Relative Spectral Response
RSS	Root Sum Squared (Uncertainty in the Level 1B Product)
SAM	Space View Analog Module
SBR	Santa Barbara Remote Sensing
Scan	1.4771 second cross-track sweep
SD	Solar Diffuser
SDS	Solar Diffuser Screen; also Science Data Set
SDSM	Solar Diffuser Stability Monitor
SDST	Science Data Support Team
SI	Scaled Integer
SiPD	Silicon Photodiode
SIS	Solar Integrating Sphere
SNR	Signal-to-Noise Ratio
SpMA	Spectral Measurement Assembly (used in TV)
SRCA	Spectro-radiometric Calibration Assembly
SV	Space View
SWIR	Short Wavelength Infrared
TBD	To Be Determined
TDI	Time Delay Integration
TEB	Thermal Emissive Band (20-25, 27-36)
TM	Thematic Mapper
TOA	Top of the Atmosphere
TV	Thermal Vacuum
UI	Uncertainty Index
VIS	Visible